


Models SRS-S, SRS-M, and SRS-N

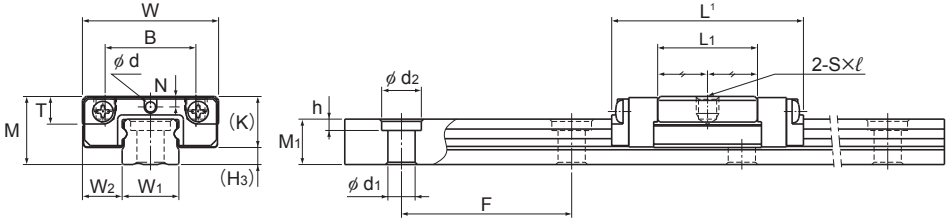




Models SRS5M/N

Model No.	Outer dimensions			LM block dimensions								H ₃
	Height	Width	Length ¹	B	C	S×ℓ	L ₁	T	K	N	Lubrication hole	
	M	W	L								d	
SRS 5M SRS 5GM	6	12	16.9	8	—	M2×1.5	8.8	1.7	4.5	0.93	0.8	1.5
SRS 5N SRS 5GN	6	12	20.1	8	—	M2×1.5	12	1.7	4.5	0.93	0.8	1.5
SRS 7S SRS 7GS	8	17	19	12	—	M2×2.3	9	3.3	6.7	1.6	1.2	1.3
SRS 7M SRS 7GM	8	17	23.4	12	8	M2×2.3	13.4	3.3	6.7	1.6	1.2	1.3
SRS 7N SRS 7GN	8	17	31	12	13	M2×2.3	21	3.3	6.7	1.6	1.2	1.3
SRS 9XS SRS 9XGS	10	20	21.5	15	—	M3×2.8	10.5	4.5	8.5	2.4	1.6	1.5
SRS 9XM SRS 9XGM	10	20	30.8	15	10	M3×2.8	19.8	4.5	8.5	2.4	1.6	1.5
SRS 9XN SRS 9XGN	10	20	40.8	15	16	M3×2.8	29.8	4.5	8.5	2.4	1.6	1.5
SRS 12S SRS 12GS	13	27	25	20	—	M3×3.2	11.2	5.7	11	3	2	2.1
SRS 12M SRS 12GM	13	27	34.4	20	15	M3×3.2	20.6	5.7	11	3	2	2.1
SRS 12N SRS 12GN	13	27	47.1	20	20	M3×3.2	33.3	5.7	11	3	2	2.1

Model number coding

2 SRS12M QZ UU C1 +220L P M - II

Model No.	With QZ Lubricator	Contamination protection accessory symbol	LM rail length (in mm)	Stainless steel LM rail	Symbol for No. of rails used on the same plane
No. of LM blocks used on the same rail	Radial clearance symbol	Normal (No symbol)/Light preload (C1)	Accuracy symbol	Normal grade (No symbol)/High accuracy grade (H)	Precision grade (P)

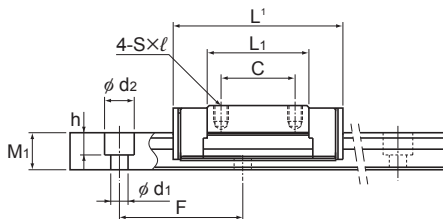

Models SRS7 to 12M/N

Models SRS7 to 12S

Unit: mm

	LM rail dimensions						Basic load rating ³		Static permissible moment N·m ⁴					Mass	
	Width		Height	Pitch		Length ²	C	C ₀	M _A		M _B		M _C	LM block	LM rail
	W ₁		M ₁	F	d ₁ ×d ₂ ×h	Max	kN	kN	1 block		1 block		1 block	kg	kg/m
	W ₁ ₀ -0.02	W ₂	M ₁	F	d ₁ ×d ₂ ×h	Max	kN	kN	1 block	2 blocks	1 block	2 blocks	1 block	kg	kg/m
	5	3.5	4	15	2.4×3.5×1	220	0.439 0.366	0.468 0.527	0.74 0.79	5.11 5.76	0.86 0.94	5.99 6.91	1.21 1.37	0.002	0.13
	5	3.5	4	15	2.4×3.5×1	220	0.515 0.448	0.586 0.703	1.12 1.34	7.45 8.82	1.31 1.57	8.73 10.3	1.52 1.83	0.003	0.13
	7	5	4.7	15	2.4×4.2×2.3	480	1.09 0.946	0.964 1.16	1.60 1.96	12.6 14.7	1.83 2.25	14.5 16.9	3.73 4.49	0.005	0.25
	7	5	4.7	15	2.4×4.2×2.3	480	1.51 1.16	1.29 1.54	3.09 3.61	17.2 25.5	3.69 4.14	17.3 29.4	5.02 6.57	0.009	0.25
	7	5	4.7	15	2.4×4.2×2.3	480	2.01 1.63	2.31 2.51	7.77 8.08	43.2 46.9	8.96 9.32	50.0 54.2	8.96 9.72	0.012	0.25
	9	5.5	5.5	20	3.5×6×3.3	1240	1.78 1.37	1.53 1.53	3.15 2.85	22.2 22.6	3.61 3.27	25.6 26	7.04 7.04	0.009	0.36
	9	5.5	5.5	20	3.5×6×3.3	1240	2.69 2.22	2.75 3.06	9.31 9.87	52.2 57.9	10.7 11.4	60.3 66.9	12.7 14.1	0.016	0.36
	9	5.5	5.5	20	3.5×6×3.3	1240	3.48 2.94	3.98 4.59	18.7 21.1	96.5 111	21.6 24.4	112 128	18.3 21.1	0.024	0.36
	12	7.5	7.5	25	3.5×6×4.5	2000	2.70 2.07	2.10 2.10	4.62 4.17	37.5 38.1	4.62 4.17	37.5 38.1	13.8 13.8	0.017	0.65
	12	7.5	7.5	25	3.5×6×4.5	2000	4.00 3.36	3.53 3.55	12.0 12.1	78.5 79.0	12.0 12.1	78.5 79.0	23.1 23.2	0.027	0.65
	12	7.5	7.5	25	3.5×6×4.5	2000	5.82 4.72	5.30 6.83	28.4 34.8	151 195	28.4 34.8	151 195	34.7 44.7	0.049	0.65