
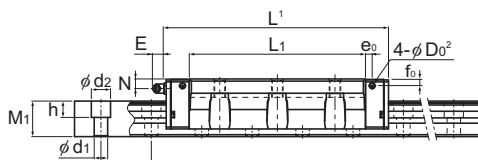
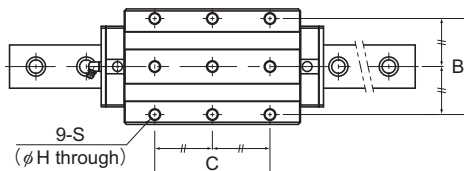


Models SRG-C, SRG-LC, and SRG-SLC



Models SRG35 and 45 SLC

Unit: mm

	H ₃	LM rail dimensions						Basic load rating ¹⁾		Static permissible moment kN·m ⁵⁾					Mass	
		Width	Height	Pitch		Length ³⁾		C	C ₀	M _A		M _B		M _C	LM block	LM rail
		W ₁ 0 -0.05	W ₂	M ₁	F	d ₁ × d ₂ × h	Max	kN	kN	1 block	2 blocks	1 block	2 blocks	1 block	kg	kg/m
	6	34	33	30	40	9×14×12	3000	59.1 55.3	119 131	1.66 1.77	10.1 11.1	1.66 1.77	10.1 11.1	2.39 2.69	1.9	6.9
	6	34	33	30	40	9×14×12	3000	76 71.4	165 182	3.13 3.39	17 18.8	3.13 3.39	17 18.8	3.31 3.74	2.4	6.9
	6	34	33	30	40	9×14×12	3000	87.9 83.4	199 222	4.53 5	23.9 26.6	4.53 5	23.9 26.6	4.09 4.56	3.2	6.9
	8	45	37.5	37	52.5	14×20×17	3090	91.9 87.8	192 216	3.49 3.9	20 22.5	3.49 3.9	20 22.5	4.98 5.87	3.7	11.6
	8	45	37.5	37	52.5	14×20×17	3090	115 110	256 288	6.13 6.87	32.2 36.3	6.13 6.87	32.2 36.3	6.64 7.83	4.5	11.6
	8	45	37.5	37	52.5	14×20×17	3090	139 133	328 368	9.99 11.1	50 56	9.99 11.1	50 56	8.91 10	6.3	11.6