


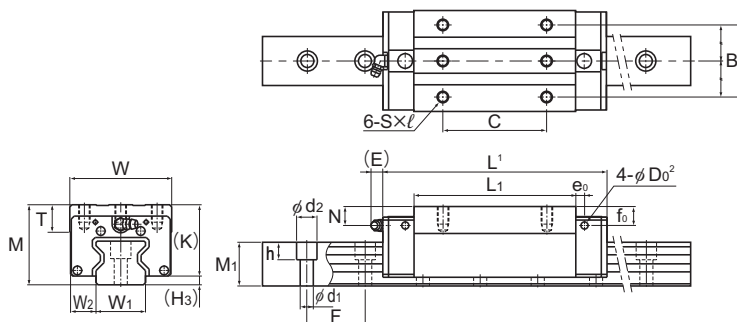

Models SRG25X and 30X R/LR

Unit: mm

LM rail dimensions							Basic load rating ¹		Static permissible moment kN·m ⁵					Mass	
H ₃	Width	W ₂	Height	Pitch	d ₁ × d ₂ × h	Length ³	C	C ₀	M _A		M _B		M _C	LM block	LM rail
	W ₁ 0 -0.05		M ₁	F		Max	kN	kN	1 block	2 blocks	1 block	2 blocks	1 block	kg	kg/m
4	15	9.5	15.5	30	4.5 × 7.5 × 5.3	3000	11.3 11.3	25.8 30.9	0.21 0.25	1.24 1.49	0.21 0.25	1.24 1.49	0.24 0.3	0.15	1.58
4.6	20	12	20	30	6 × 9.5 × 8.5	3000	21 20.6	46.9 54.4	0.48 0.56	2.74 3.25	0.48 0.56	2.74 3.25	0.58 0.68	0.28	2.58
4.6	20	12	20	30	6 × 9.5 × 8.5	3000	26.7 25.9	63.8 73.1	0.88 0.99	4.49 5.27	0.88 0.99	4.49 5.25	0.79 0.91	0.38	2.58
4.5	23	12.5	23	30	7 × 11 × 9	3000	27.9 26.7	57.5 65	0.64 0.76	3.7 4.31	0.64 0.76	3.7 4.31	0.8 0.9	0.6	3.6
4.5	23	12.5	23	30	7 × 11 × 9	3000	34.2 32.9	75 85	1.07 1.27	5.74 6.69	1.07 1.27	5.74 6.69	1.03 1.18	0.8	3.6
5	28	16	26	40	9 × 14 × 12	3000	39.3 38.7	82.5 96.9	1.02 1.23	6.21 7.25	1.02 1.23	6.21 7.25	1.47 1.62	0.9	4.4
5	28	16	26	40	9 × 14 × 12	3000	48.3 47.4	108 126	1.76 2.04	9.73 11.3	1.76 2.04	9.73 11.3	1.92 2.11	1.2	4.4