


SKR26 Without Cover, Direct Motor Coupling

Model SKR26□□A (with a Single Long Block)

Model SKR26□□B (with Two Long Blocks)

For model number coding, see **A2-28**.

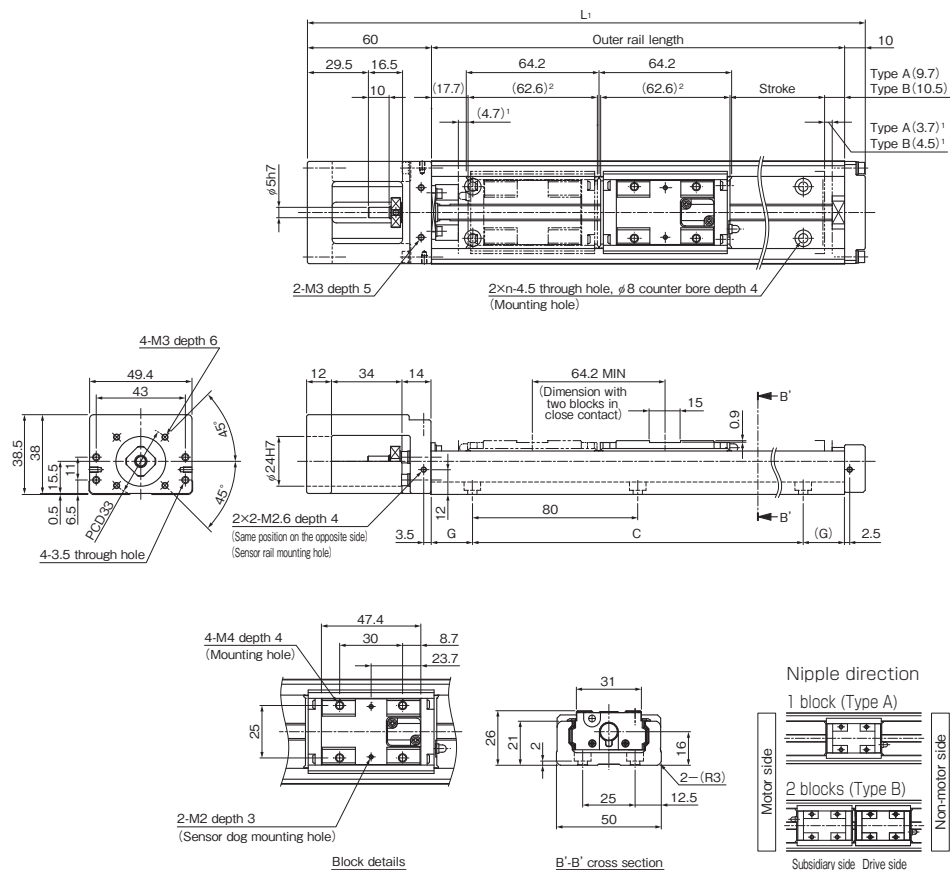

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 126.8 mm (total) for an SKR26 with two blocks in close contact with each other (Type B).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B ¹						Type A	Type B
60 (68.4)	—	150	220	80	35	2	1.01	—
110 (118.4)	45 (54.2)	200	270	160	20	3	1.22	1.39
160 (168.4)	95 (104.2)	250	320	160	45	3	1.43	1.6
210 (218.4)	145 (154.2)	300	370	240	30	4	1.64	1.81

¹ Indicates a value when two inner blocks are in close contact with each other.

For model number coding, see **A2-28**.



Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B'						Type A	Type B
60 (68.4)	—	150	220	80	35	2	1.17	—
110 (118.4)	45 (54.2)	200	270	160	20	3	1.39	1.64
160 (168.4)	95 (104.2)	250	320	160	45	3	1.61	1.86
210 (218.4)	145 (154.2)	300	370	240	30	4	1.83	2.08

¹ Indicates a value when two inner blocks are in close contact with each other.