


SKR26 Without Cover, Motor Wrap

Model SKR26□□A (with a Single Long Block)

Model SKR26□□B (with Two Long Blocks)

For model number coding, see **A2-28**.

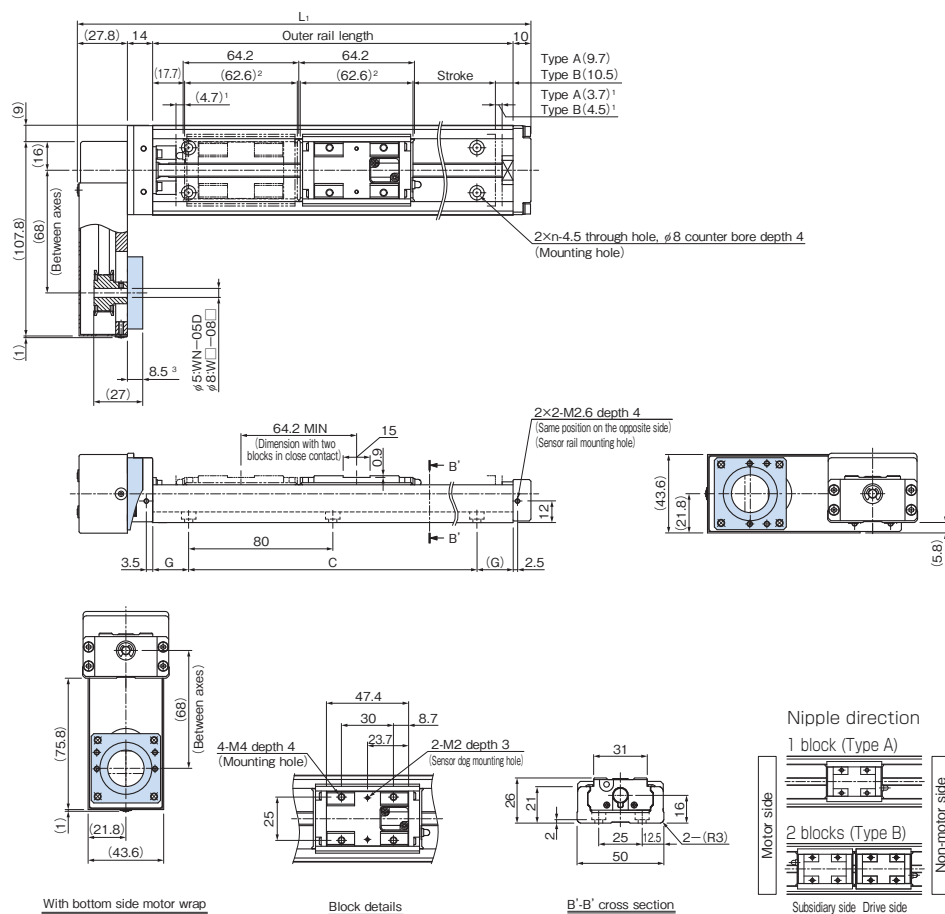

With bottom side motor wrap

Block details

B'-B' cross section

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 126.8 mm (total) for an SKR26 with two blocks in close contact with each other (Type B).

³ Dimensions will vary if "WN" is selected for model number coding **H** Housing A/intermediate flange. For details, see **A2-99**.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B ¹						Type A	Type B
60 (68.4)	—	150	201.8	80	35	2	1.24	—
110 (118.4)	45 (54.2)	200	251.8	160	20	3	1.45	1.62
160 (168.4)	95 (104.2)	250	301.8	160	45	3	1.66	1.83
210 (218.4)	145 (154.2)	300	351.8	240	30	4	1.87	2.04


¹ Indicates a value when two inner blocks are in close contact with each other.

SKR26 With Cover, Motor Wrap

Model SKR26□□A (with a Single Long Block)

Model SKR26□□B (with Two Long Blocks)

For model number coding, see **A2-28**.

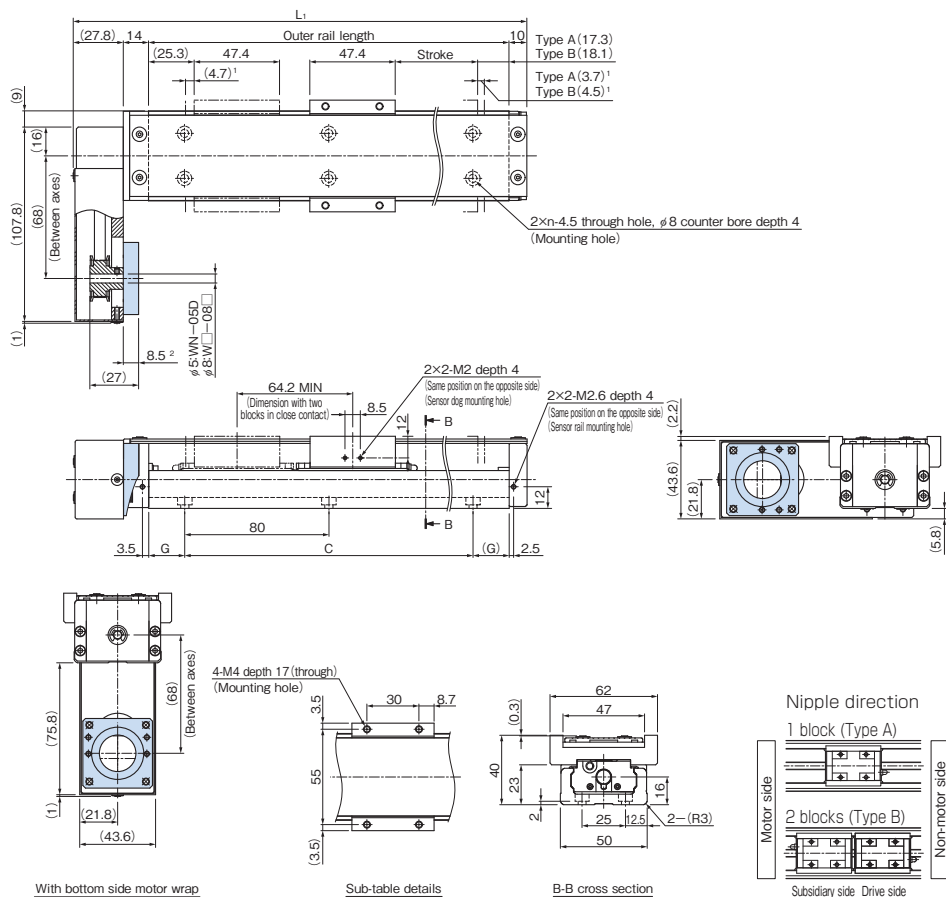

¹ Distance between the mechanical stopper and the stroke starting position.

² Dimensions will vary if "WN" is selected for model number coding. ϕ Housing A/intermediate flange. For details, see **A2-99**.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B ¹						Type A	Type B
60 (68.4)	—	150	201.8	80	35	2	1.39	—
110 (118.4)	45 (54.2)	200	251.8	160	20	3	1.61	1.86
160 (168.4)	95 (104.2)	250	301.8	160	45	3	1.84	2.09
210 (218.4)	145 (154.2)	300	351.8	240	30	4	2.06	2.31

¹ Indicates a value when two inner blocks are in close contact with each other.