


SKR33 Without Cover, Direct Motor Coupling

Model SKR33□□A (with a Single Long Block)

Model SKR33□□B (with Two Long Blocks)

For model number coding, see **A2-28**.

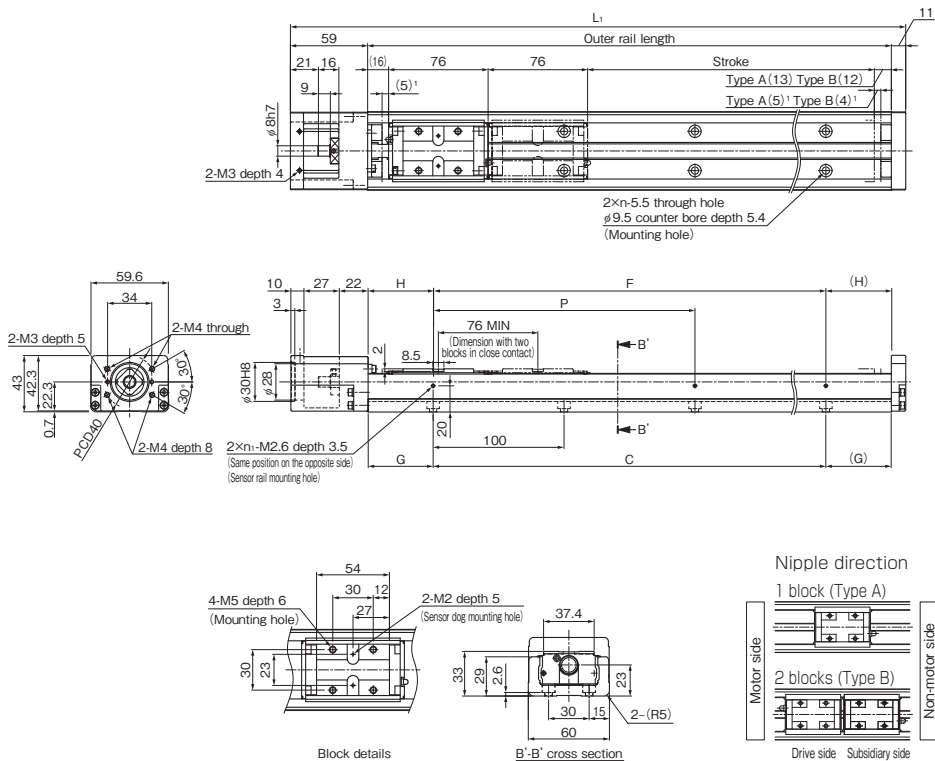

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type A	Type B ¹										Type A	Type B
45 (55)	—	150	220	100	25	100	100	25	2	2	1.9	—
95 (105)	—	200	270	100	50	100	100	50	2	2	2.3	—
195 (205)	120 (129)	300	370	200	50	200	200	50	3	2	3	3.4
295 (305)	220 (229)	400	470	300	50	200	200	100	4	2	3.7	4.1
395 (405)	320 (329)	500	570	400	50	200	400	50	5	3	4.5	4.9
495 (505)	420 (429)	600	670	500	50	200	400	100	6	3	5.2	5.6
595 (605)	520 (529)	700	770	600	50	200	600	50	7	4	5.9	6.3

¹ Indicates a value when two inner blocks are in close contact with each other.

¹ Indicates a value when two inner blocks are in close contact with each other.