


SKR46 Without Cover, Direct Motor Coupling

Model SKR46□□C (with a Single Short Block)

Model SKR46□□D (with Two Short Blocks)

For model number coding, see **A2-28**.

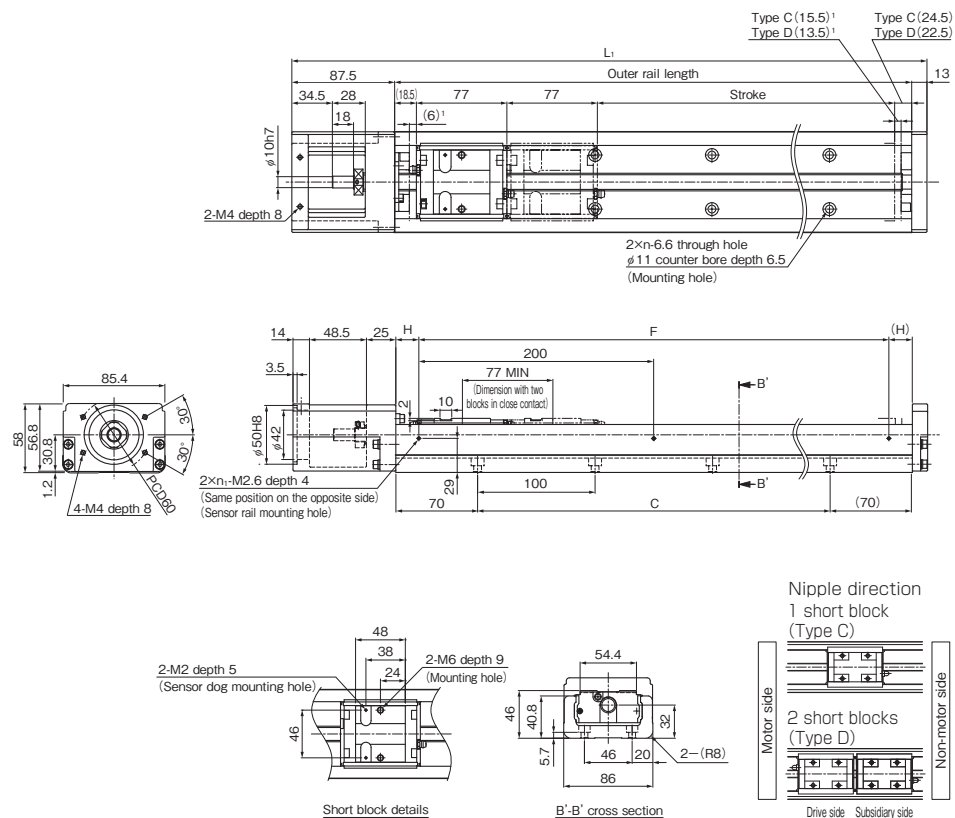

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type C	Type D ¹								Type C	Type D
220 (241.5)	145 (164.5)	340	440.5	200	200	70	3	2	6.3	6.9
320 (341.5)	245 (264.5)	440	540.5	300	400	20	4	3	7.7	8.3
420 (441.5)	345 (364.5)	540	640.5	400	400	70	5	3	9.1	9.7
520 (541.5)	445 (464.5)	640	740.5	500	600	20	6	4	10.5	11.1
620 (641.5)	545 (564.5)	740	840.5	600	600	70	7	4	11.9	12.5
720 (741.5)	645 (664.5)	840	940.5	700	800	20	8	5	13.4	14
820 (841.5)	745 (764.5)	940	1,040.5	800	800	70	9	5	14.8	15.4

¹ Indicates a value when two inner blocks are in close contact with each other.

¹ Distance between the mechanical stopper and the stroke starting position.