


Model KR15 B (with Two Long Blocks)




Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B ¹						Type A	Type B
25 (31.4)	—	75	129	50	12.5	2	0.2	—
50 (56.4)	—	100	154	50	25	2	0.23	—
75 (81.4)	40 (48.4)	125	179	100	12.5	3	0.26	0.3
100 (106.4)	65 (73.4)	150	204	100	25	3	0.29	0.33
125 (131.4)	90 (98.4)	175	229	150	12.5	4	0.32	0.36
150 (156.4)	115 (123.4)	200	254	150	25	4	0.35	0.39

KR15 With Cover, Direct Motor Coupling

Model KR15 A (with a Single Long Block)

Model KR15 B (with Two Long Blocks)

LM Guide Actuator

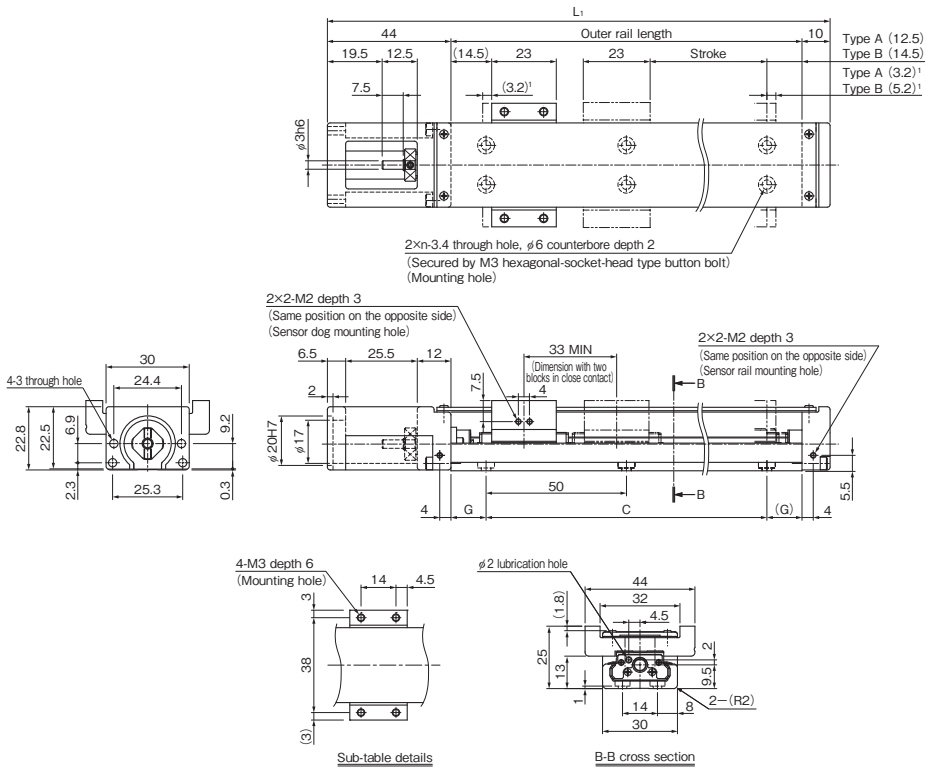

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B ¹						Type A	Type B
25 (31.4)	—	75	129	50	12.5	2	0.25	—
50 (56.4)	—	100	154	50	25	2	0.28	—
75 (81.4)	40 (48.4)	125	179	100	12.5	3	0.32	0.39
100 (106.4)	65 (73.4)	150	204	100	25	3	0.35	0.42
125 (131.4)	90 (98.4)	175	229	150	12.5	4	0.38	0.45
150 (156.4)	115 (123.4)	200	254	150	25	4	0.41	0.48