


## KR15 Without Cover, Motor Wrap

## Model KR15□□A (with a Single Long Block)

## Model KR15□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

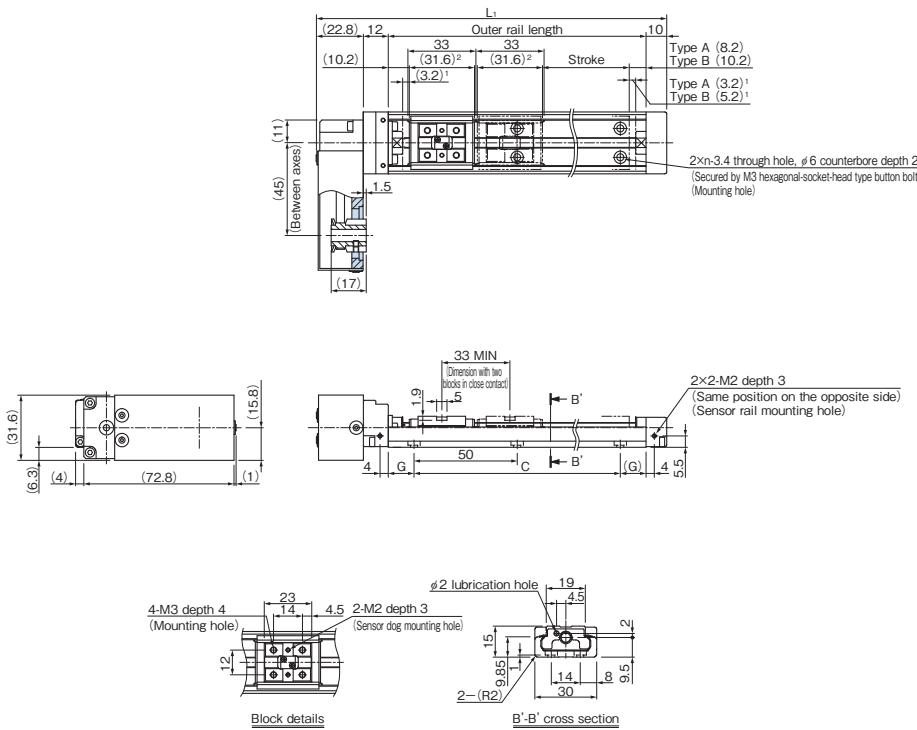

<sup>1</sup> Distance between the mechanical stopper and the stroke starting position.

<sup>2</sup> This indicates the block length when calculating the possible stroke range. It is 64.6 mm (total) for a KR15 with two blocks in close contact with each other (Type B).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L <sub>1</sub> (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B <sup>1</sup>						Type A	Type B
25 (31.4)	—	75	119.8	50	12.5	2	0.38	—
50 (56.4)	—	100	144.8	50	25	2	0.41	—
75 (81.4)	40 (48.4)	125	169.8	100	12.5	3	0.44	0.48
100 (106.4)	65 (73.4)	150	194.8	100	25	3	0.47	0.51
125 (131.4)	90 (98.4)	175	219.8	150	12.5	4	0.5	0.54
150 (156.4)	115 (123.4)	200	244.8	150	25	4	0.53	0.57


<sup>1</sup> Indicates a value when two inner blocks are in close contact with each other.

# KR15 With Cover, Motor Wrap

Model KR15□□A (with a Single Long Block)

Model KR15□□B (with Two Long Blocks)

For model number coding, see **12-136**.

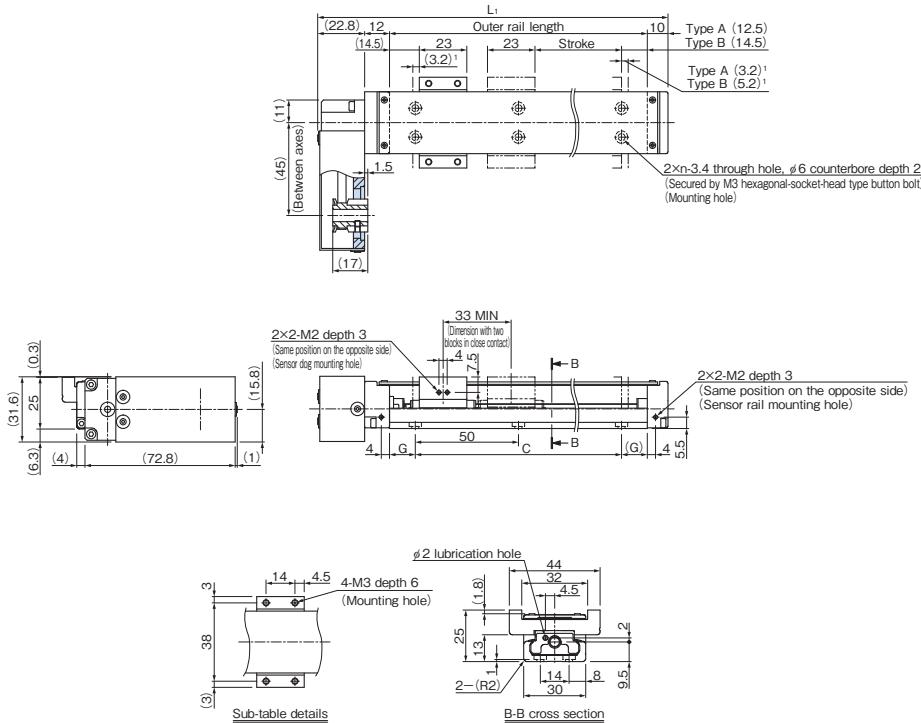

<sup>1</sup> Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L <sub>1</sub> (mm)	C (mm)	G (mm)	n	Overall main unit mass (kg)	
Type A	Type B <sup>1</sup>						Type A	Type B
25 (31.4)	—	75	119.8	50	12.5	2	0.43	—
50 (56.4)	—	100	144.8	50	25	2	0.46	—
75 (81.4)	40 (48.4)	125	169.8	100	12.5	3	0.49	0.56
100 (106.4)	65 (73.4)	150	194.8	100	25	3	0.53	0.6
125 (131.4)	90 (98.4)	175	219.8	150	12.5	4	0.56	0.63
150 (156.4)	115 (123.4)	200	244.8	150	25	4	0.59	0.66

<sup>1</sup> Indicates a value when two inner blocks are in close contact with each other.