


KR30H Without Cover, Direct Motor Coupling

Model KR30H□□A (with a Single Long Block)

Model KR30H□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

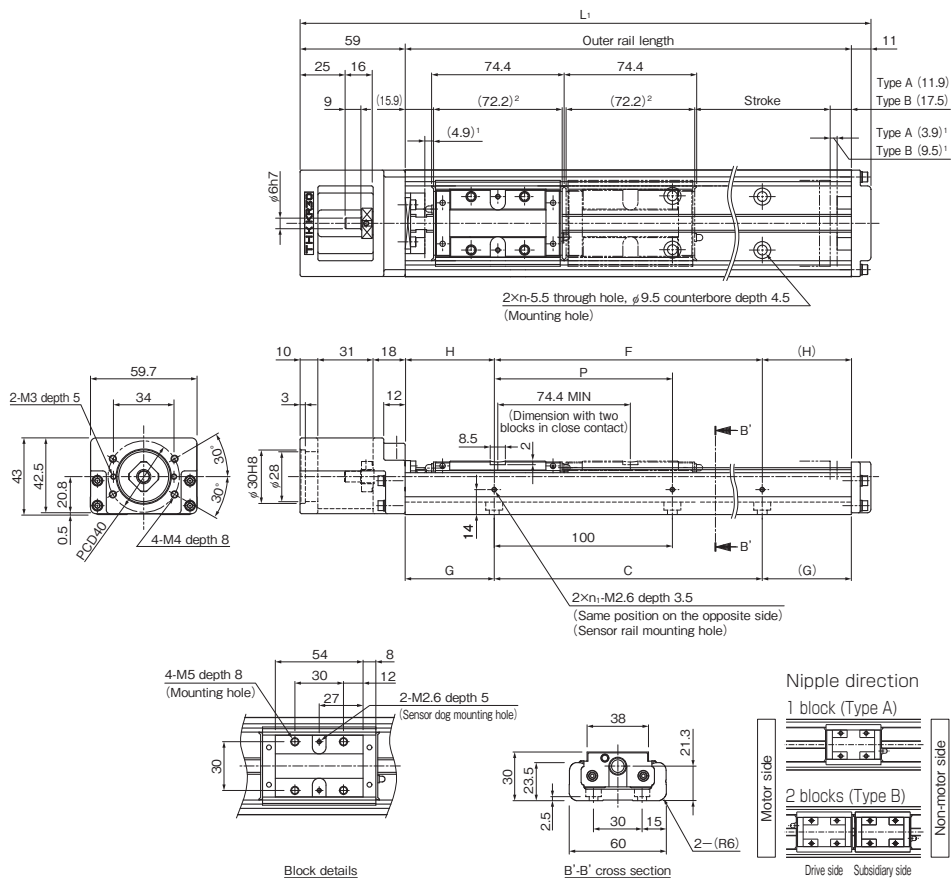

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 146.6 mm (total) for a KR30H with two blocks in close contact with each other (Type B).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹										Type A	Type B
50 (58.8)	—	150	220	100	25	100	100	25	2	2	1.6	—
100 (108.8)	—	200	270	100	50	100	100	50	2	2	1.9	—
200 (208.8)	120 (134.4)	300	370	200	50	200	200	50	3	2	2.5	2.9
300 (308.8)	220 (234.4)	400	470	300	50	200	200	100	4	2	3	3.4
400 (408.8)	320 (334.4)	500	570	400	50	200	400	50	5	3	3.6	4
500 (508.8)	420 (434.4)	600	670	500	50	200	400	100	6	3	4.2	4.6

¹ Indicates a value when two inner blocks are in close contact with each other.

