


KR30H Without Cover, Direct Motor Coupling

Model KR30H□□C (with a Single Short Block)

Model KR30H□□D (with Two Short Blocks)

For model number coding, see **A2-136**.

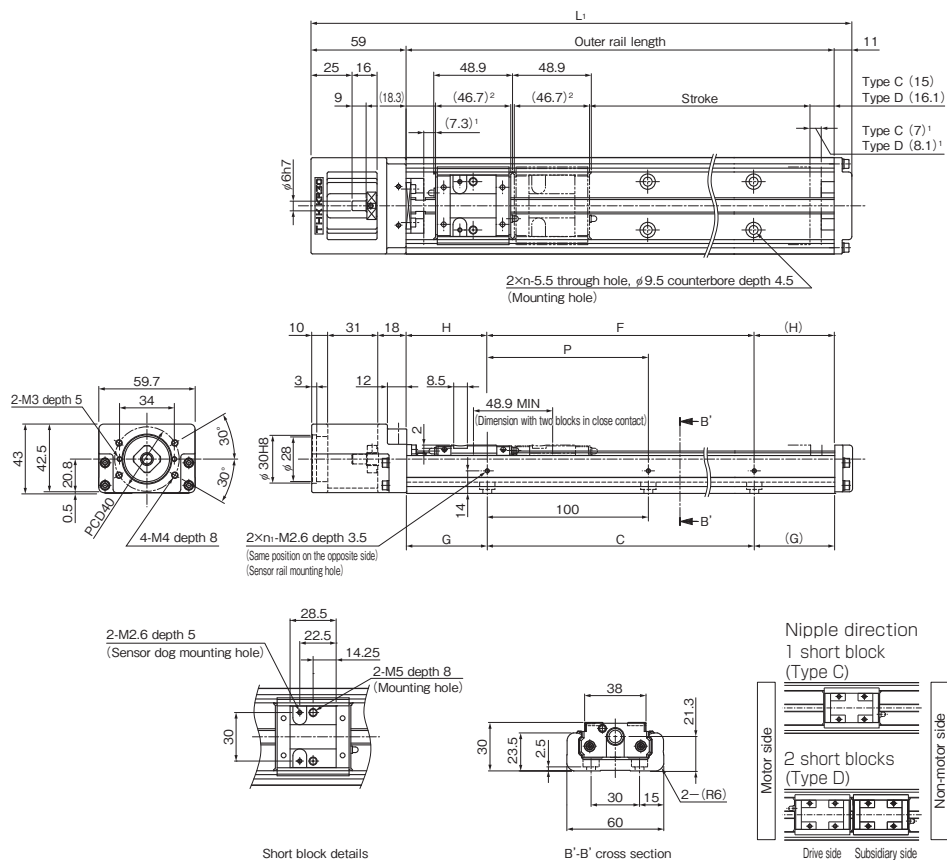

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the short block length when calculating the possible stroke range.

It is 95.6 mm (total) for a KR30H with two short blocks in close contact with each other (Type D).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type C	Type D¹										Type C	Type D
70 (84.3)	20 (35.4)	150	220	100	25	100	100	25	2	2	1.4	1.6
120 (134.3)	70 (85.4)	200	270	100	50	100	100	50	2	2	1.7	1.9
220 (234.3)	170 (185.4)	300	370	200	50	200	200	50	3	2	2.3	2.5
320 (334.3)	270 (285.4)	400	470	300	50	200	200	100	4	2	2.8	3
420 (434.3)	370 (385.4)	500	570	400	50	200	400	50	5	3	3.4	3.6
520 (534.3)	470 (485.4)	600	670	500	50	200	400	100	6	3	4	4.2


¹ Indicates a value when two inner blocks are in close contact with each other.

KR30H With Cover, Direct Motor Coupling

Model KR30H□□C (with a Single Short Block)

Model KR30H□□D (with Two Short Blocks)

For model number coding, see **A2-136**.

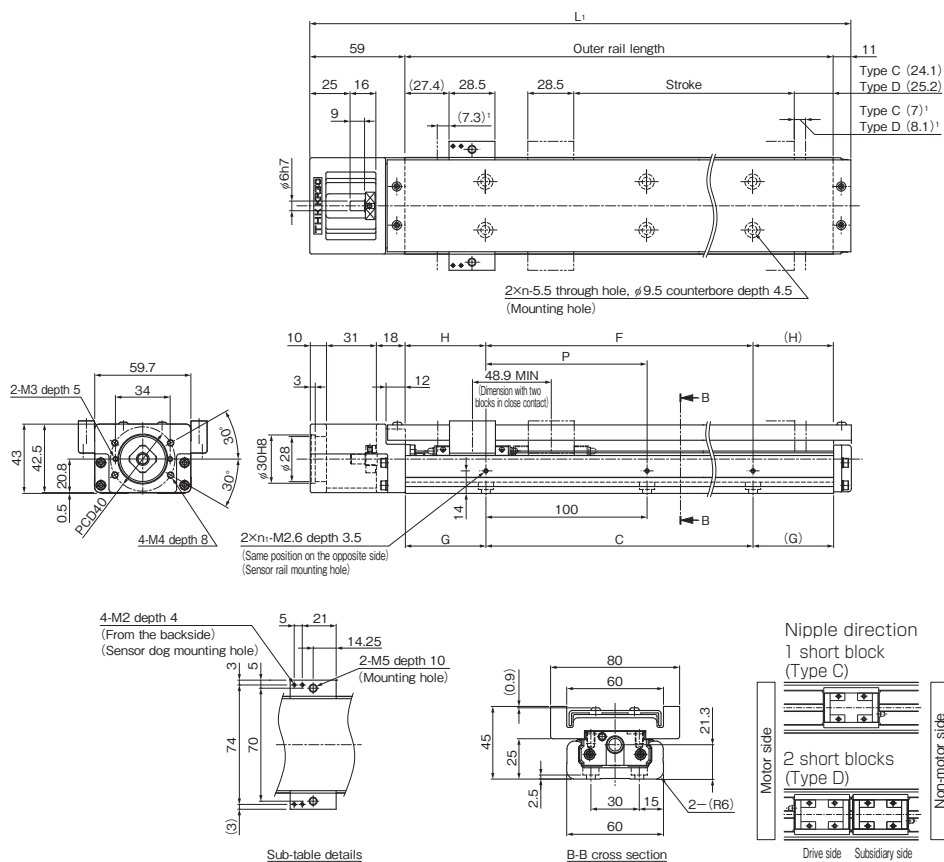

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type C	Type D ¹										Type C	Type D
70 (84.3)	20 (35.4)	150	220	100	25	100	100	25	2	2	1.6	1.9
120 (134.3)	70 (85.4)	200	270	100	50	100	100	50	2	2	1.9	2.2
220 (234.3)	170 (185.4)	300	370	200	50	200	200	50	3	2	2.5	2.8
320 (334.3)	270 (285.4)	400	470	300	50	200	200	100	4	2	3.1	3.4
420 (434.3)	370 (385.4)	500	570	400	50	200	400	50	5	3	3.7	4
520 (534.3)	470 (485.4)	600	670	500	50	200	400	100	6	3	4.3	4.6

¹ Indicates a value when two inner blocks are in close contact with each other.