


KR33 Without Cover, Direct Motor Coupling

Model KR33□□A (with a Single Long Block)

Model KR33□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

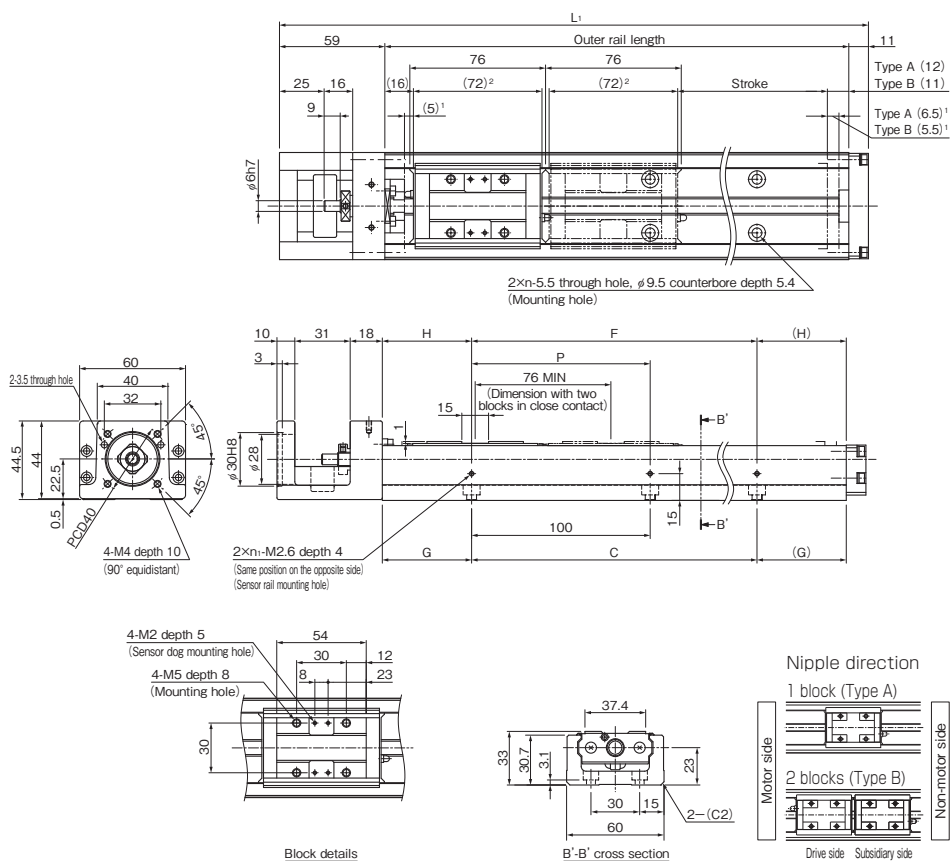

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 148 mm (total) for a KR33 with two blocks in close contact with each other (Type B, without QZ).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹										Type A	Type B
50 (61.5)	—	150	220	100	25	100	100	25	2	2	1.9	—
100 (111.5)	—	200	270	100	50	100	100	50	2	2	2.2	—
200 (211.5)	125 (135.5)	300	370	200	50	200	200	50	3	2	3	3.4
300 (311.5)	225 (235.5)	400	470	300	50	200	200	100	4	2	3.7	4.1
400 (411.5)	325 (335.5)	500	570	400	50	200	400	50	5	3	4.4	4.8
500 (511.5)	425 (435.5)	600	670	500	50	200	400	100	6	3	5.2	5.6
600 (611.5)	525 (535.5)	700	770	600	50	200	600	50	7	4	5.9	6.3


¹ Indicates a value when two inner blocks are in close contact with each other.

KR33 With Cover, Direct Motor Coupling

Model KR33□□A (with a Single Long Block)

Model KR33□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

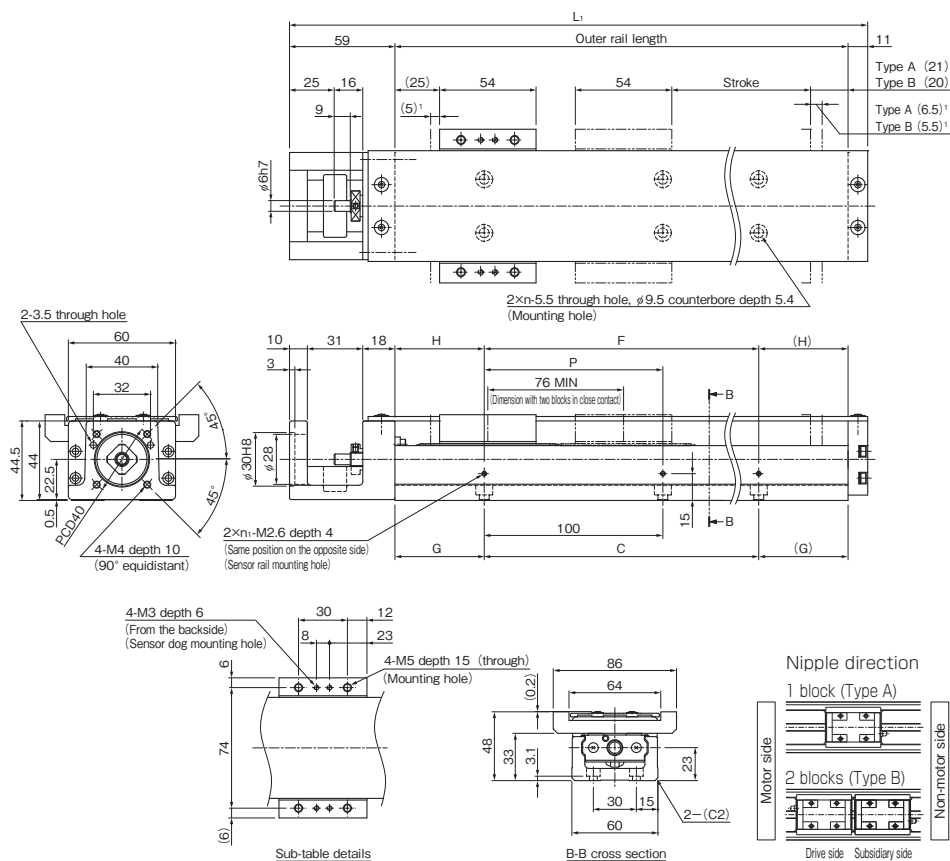

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	P (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type A	Type B ¹										Type A	Type B
50 (61.5)	—	150	220	100	25	100	100	25	2	2	2.2	—
100 (111.5)	—	200	270	100	50	100	100	50	2	2	2.6	—
200 (211.5)	125 (135.5)	300	370	200	50	200	200	50	3	2	3.3	3.9
300 (311.5)	225 (235.5)	400	470	300	50	200	200	100	4	2	4.1	4.7
400 (411.5)	325 (335.5)	500	570	400	50	200	400	50	5	3	4.9	5.5
500 (511.5)	425 (435.5)	600	670	500	50	200	400	100	6	3	5.6	6.2
600 (611.5)	525 (535.5)	700	770	600	50	200	600	50	7	4	6.4	7

¹ Indicates a value when two inner blocks are in close contact with each other.

Note: It must be noted that the cover-mounting bolt is 0.2 mm higher than the top face of the sub-table.