


KR45H Without Cover, Direct Motor Coupling

Model KR45H□□A (with a Single Long Block)

Model KR45H□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

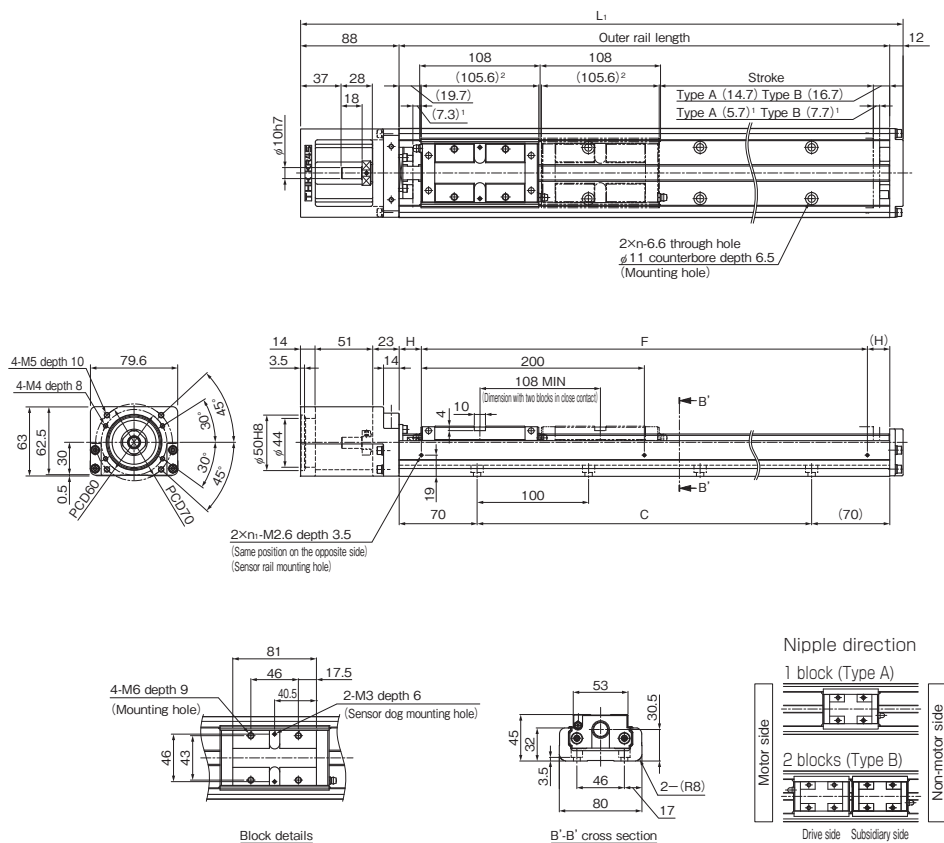

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 213.6 mm (total) for a KR45H with two blocks in close contact with each other (Type B).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type A	Type B ¹								Type A	Type B
200 (213)	90 (105)	340	440	200	200	70	3	2	5.4	6.4
300 (313)	190 (205)	440	540	300	400	20	4	3	6.5	7.5
400 (413)	290 (305)	540	640	400	400	70	5	3	7.5	8.5
500 (513)	390 (405)	640	740	500	600	20	6	4	8.6	9.6
600 (613)	490 (505)	740	840	600	600	70	7	4	9.7	10.7
700 (713)	590 (605)	840	940	700	800	20	8	5	10.7	11.7
800 (813)	690 (705)	940	1,040	800	800	70	9	5	11.8	12.8


¹ Indicates a value when two inner blocks are in close contact with each other.

KR45H With Cover, Direct Motor Coupling

Model KR45H□□A (with a Single Long Block)

Model KR45H□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

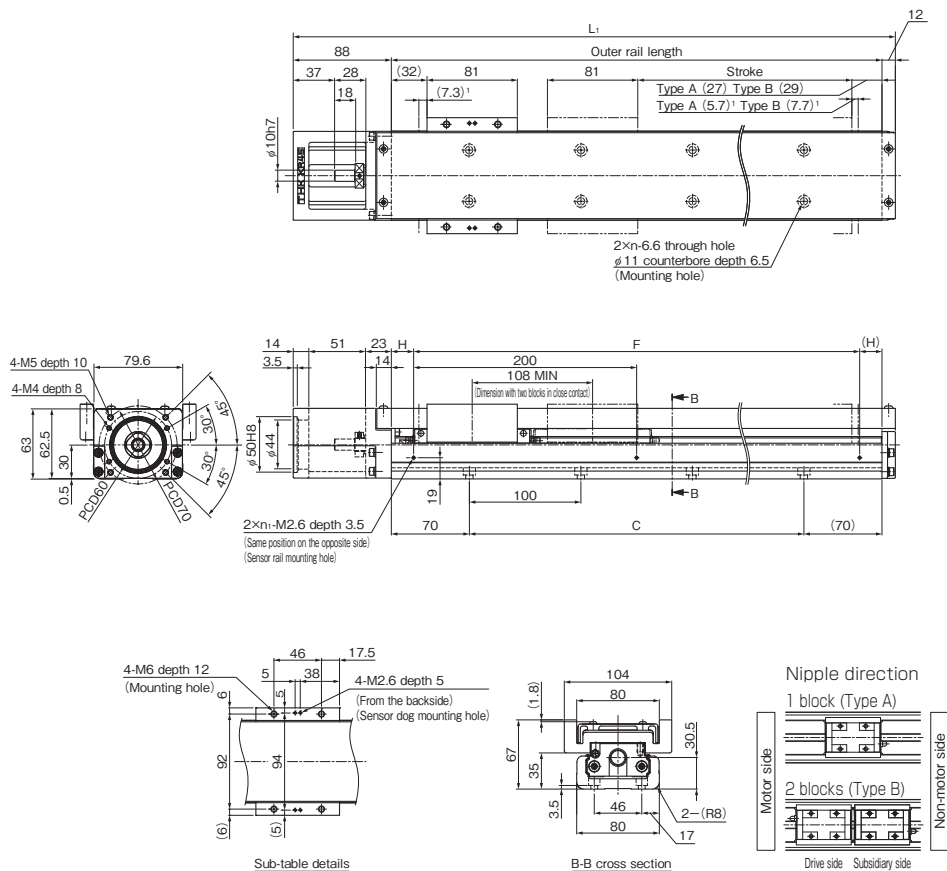¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L: (mm)	C (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹								Type A	Type B
200 (213)	90 (105)	340	440	200	200	70	3	2	6.4	7.8
300 (313)	190 (205)	440	540	300	400	20	4	3	7.6	9
400 (413)	290 (305)	540	640	400	400	70	5	3	8.7	10.1
500 (513)	390 (405)	640	740	500	600	20	6	4	9.9	11.3
600 (613)	490 (505)	740	840	600	600	70	7	4	11	12.4
700 (713)	590 (605)	840	940	700	800	20	8	5	12.2	13.6
800 (813)	690 (705)	940	1,040	800	800	70	9	5	13.3	14.7

¹ Indicates a value when two inner blocks are in close contact with each other.