


KR45H Without Cover, Motor Wrap

Model KR45H□□A (with a Single Long Block)

Model KR45H□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

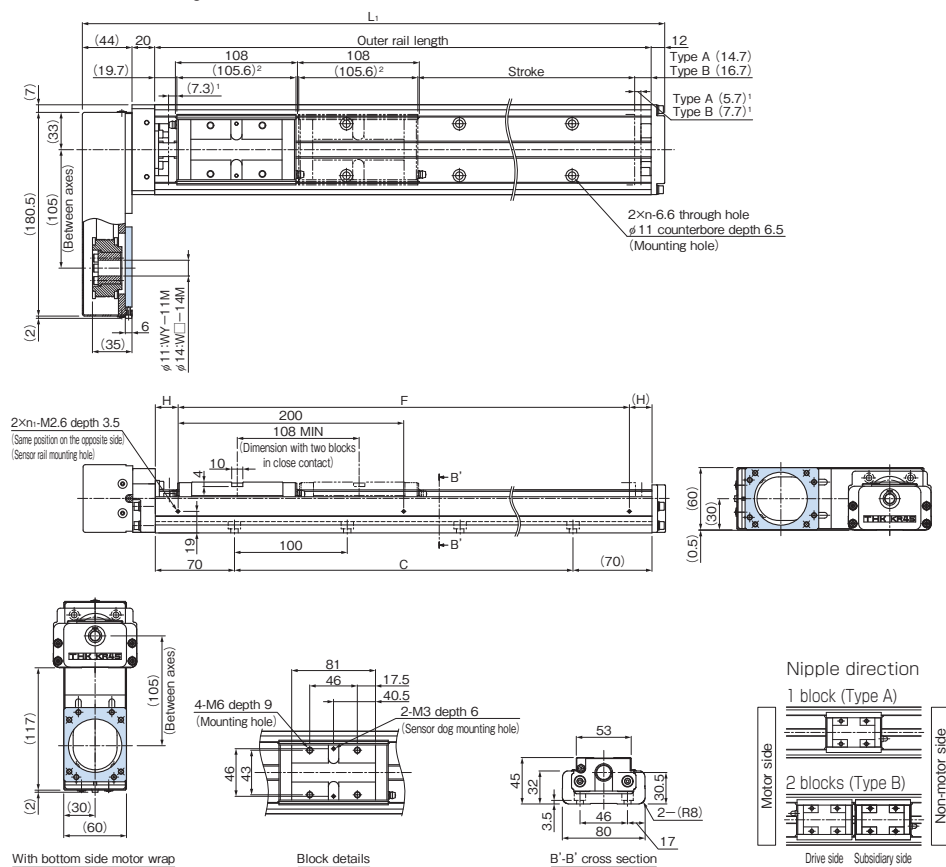

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the block length when calculating the possible stroke range.

It is 213.6 mm (total) for a KR45H with two blocks in close contact with each other (Type B).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹								Type A	Type B
200 (213)	90 (105)	340	416	200	200	70	3	2	6.4	7.4
300 (313)	190 (205)	440	516	300	400	20	4	3	7.4	8.4
400 (413)	290 (305)	540	616	400	400	70	5	3	8.5	9.5
500 (513)	390 (405)	640	716	500	600	20	6	4	9.5	10.5
600 (613)	490 (505)	740	816	600	600	70	7	4	10.6	11.6
700 (713)	590 (605)	840	916	700	800	20	8	5	11.7	12.7
800 (813)	690 (705)	940	1,016	800	800	70	9	5	12.7	13.7


¹ Indicates a value when two inner blocks are in close contact with each other.

KR45H With Cover, Motor Wrap

Model KR45H□□A (with a Single Long Block)

Model KR45H□□B (with Two Long Blocks)

For model number coding, see **A2-136**.

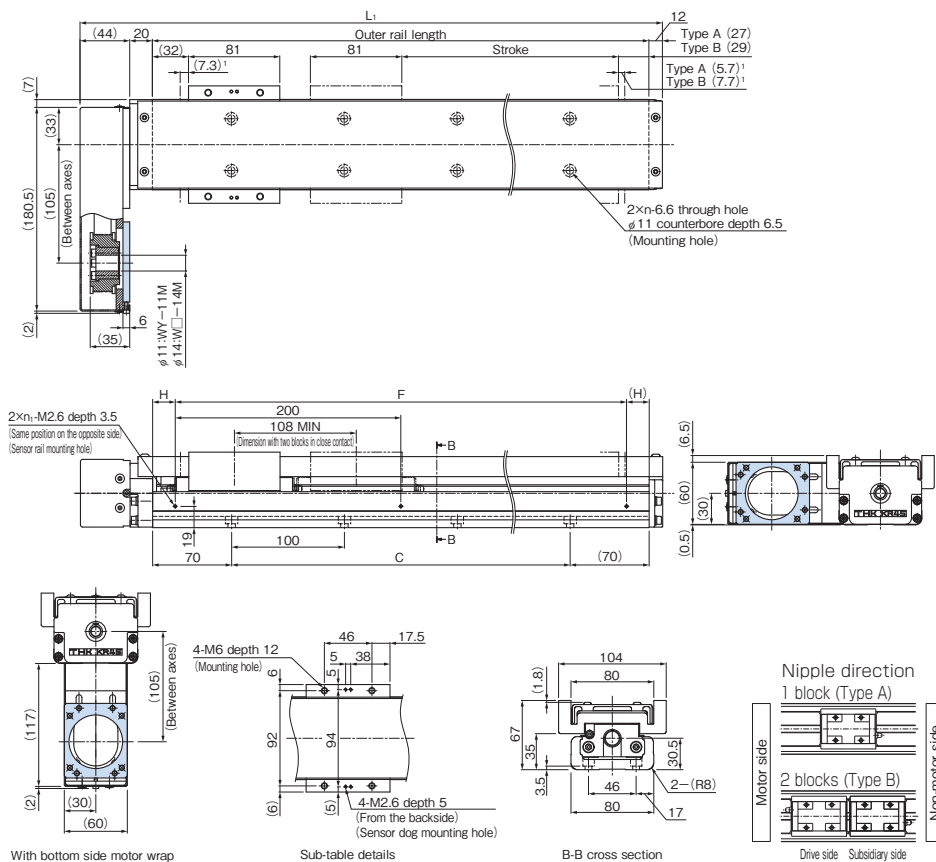

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹								Type A	Type B
200 (213)	90 (105)	340	416	200	200	70	3	2	7.4	8.8
300 (313)	190 (205)	440	516	300	400	20	4	3	8.5	9.9
400 (413)	290 (305)	540	616	400	400	70	5	3	9.7	11.1
500 (513)	390 (405)	640	716	500	600	20	6	4	10.8	12.2
600 (613)	490 (505)	740	816	600	600	70	7	4	12	13.4
700 (713)	590 (605)	840	916	700	800	20	8	5	13.1	14.5
800 (813)	690 (705)	940	1,016	800	800	70	9	5	14.2	15.6

¹ Indicates a value when two inner blocks are in close contact with each other.