


KR45H Without Cover, Direct Motor Coupling

Model KR45H□□C (with a Single Short Block)

Model KR45H□□D (with Two Short Blocks)

For model number coding, see **A2-136**.

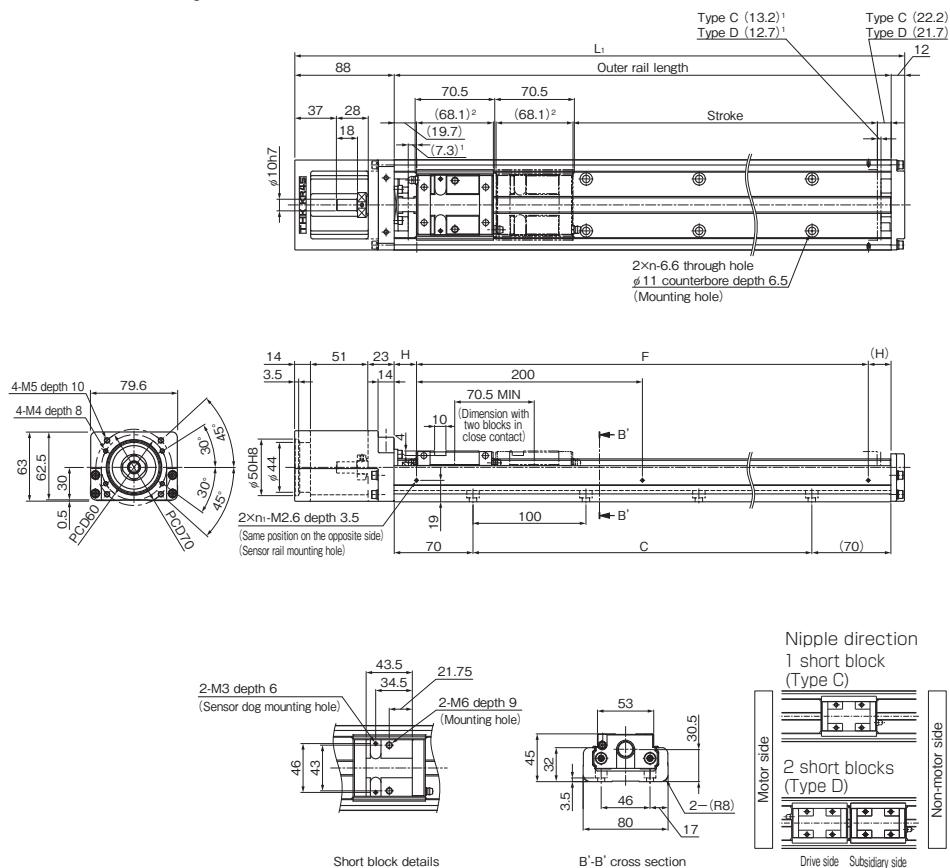

¹ Distance between the mechanical stopper and the stroke starting position.

² This indicates the short block length when calculating the possible stroke range.

It is 138.6 mm (total) for a KR45H with two short blocks in close contact with each other (Type D).

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type C	Type D ¹								Type C	Type D
230 (250.5)	160 (180)	340	440	200	200	70	3	2	5	5.6
330 (350.5)	260 (280)	440	540	300	400	20	4	3	6.1	6.7
430 (450.5)	360 (380)	540	640	400	400	70	5	3	7.1	7.7
530 (550.5)	460 (480)	640	740	500	600	20	6	4	8.2	8.8
630 (650.5)	560 (580)	740	840	600	600	70	7	4	9.3	9.9
730 (750.5)	660 (680)	840	940	700	800	20	8	5	10.3	10.9
830 (850.5)	760 (780)	940	1,040	800	800	70	9	5	11.4	12


¹ Indicates a value when two inner blocks are in close contact with each other.

KR45H With Cover, Direct Motor Coupling

Model KR45H□□C (with a Single Short Block)

Model KR45H□□D (with Two Short Blocks)

For model number coding, see **A2-136**.

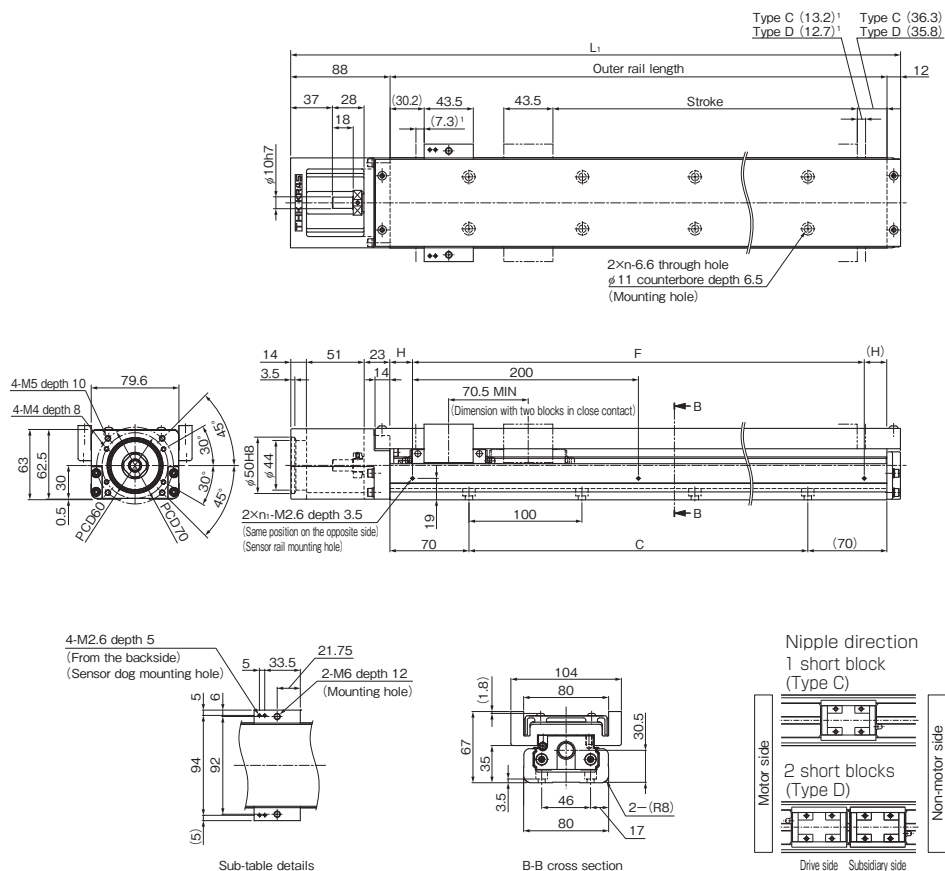

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type C	Type D ¹								Type C	Type D
230 (250.5)	160 (180)	340	440	200	200	70	3	2	5.8	6.6
330 (350.5)	260 (280)	440	540	300	400	20	4	3	7	7.8
430 (450.5)	360 (380)	540	640	400	400	70	5	3	8.1	8.9
530 (550.5)	460 (480)	640	740	500	600	20	6	4	9.3	10.1
630 (650.5)	560 (580)	740	840	600	600	70	7	4	10.4	11.2
730 (750.5)	660 (680)	840	940	700	800	20	8	5	11.6	12.4
830 (850.5)	760 (780)	940	1,040	800	800	70	9	5	12.7	13.5

¹ Indicates a value when two inner blocks are in close contact with each other.