


¹ Indicates a value when two inner blocks are in close contact with each other.

KR46 With Cover, Direct Motor Coupling

Model KR46□□C (with a Single Short Block)

Model KR46□□D (with Two Short Blocks)

For model number coding, see **A2-136**.

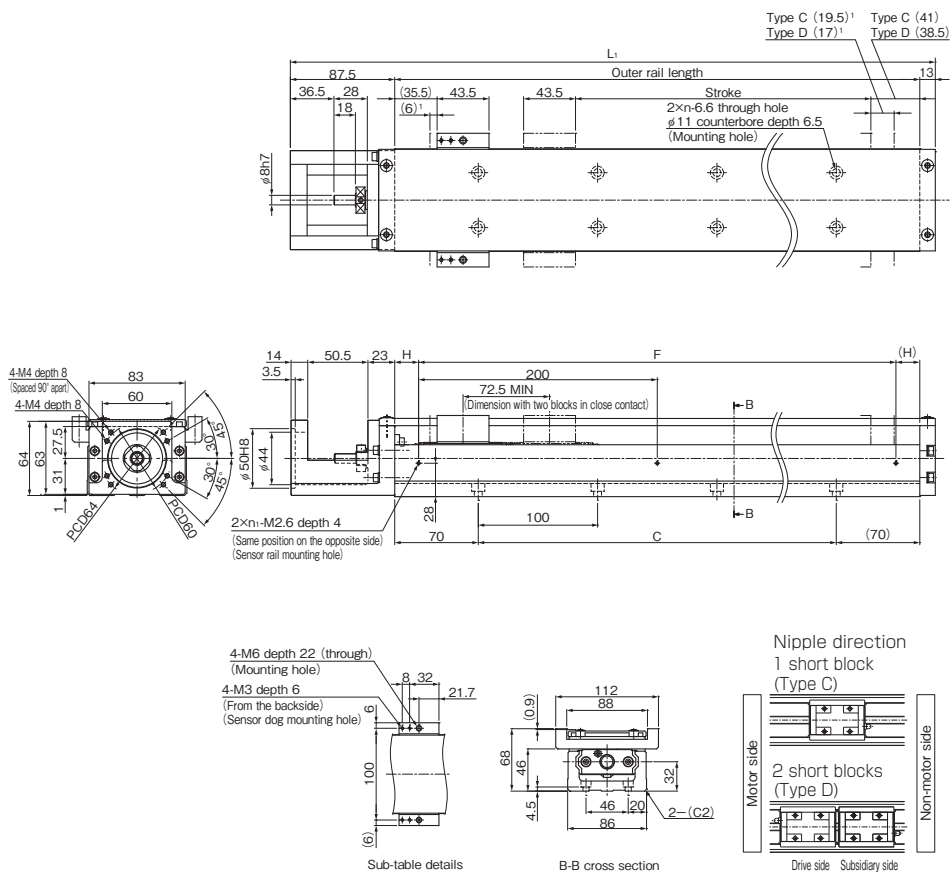

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type C	Type D ¹								Type C	Type D
220 (245.5)	150 (173)	340	440.5	200	200	70	3	2	6.9	7.7
320 (345.5)	250 (273)	440	540.5	300	400	20	4	3	8.4	9.2
420 (445.5)	350 (373)	540	640.5	400	400	70	5	3	9.9	10.7
520 (545.5)	450 (473)	640	740.5	500	600	20	6	4	11.4	12.2
620 (645.5)	550 (573)	740	840.5	600	600	70	7	4	12.9	13.7
720 (745.5)	650 (673)	840	940.5	700	800	20	8	5	14.3	15.1
820 (845.5)	750 (773)	940	1,040.5	800	800	70	9	5	15.8	16.6

¹ Indicates a value when two inner blocks are in close contact with each other.