


KR55 Without Cover, Motor Wrap

Motor Flange Size, 60×60

Model KR5520A (with a Single Long Block)

Model KR5520B (with Two Long Blocks)

For model number coding, see **A2-136**.

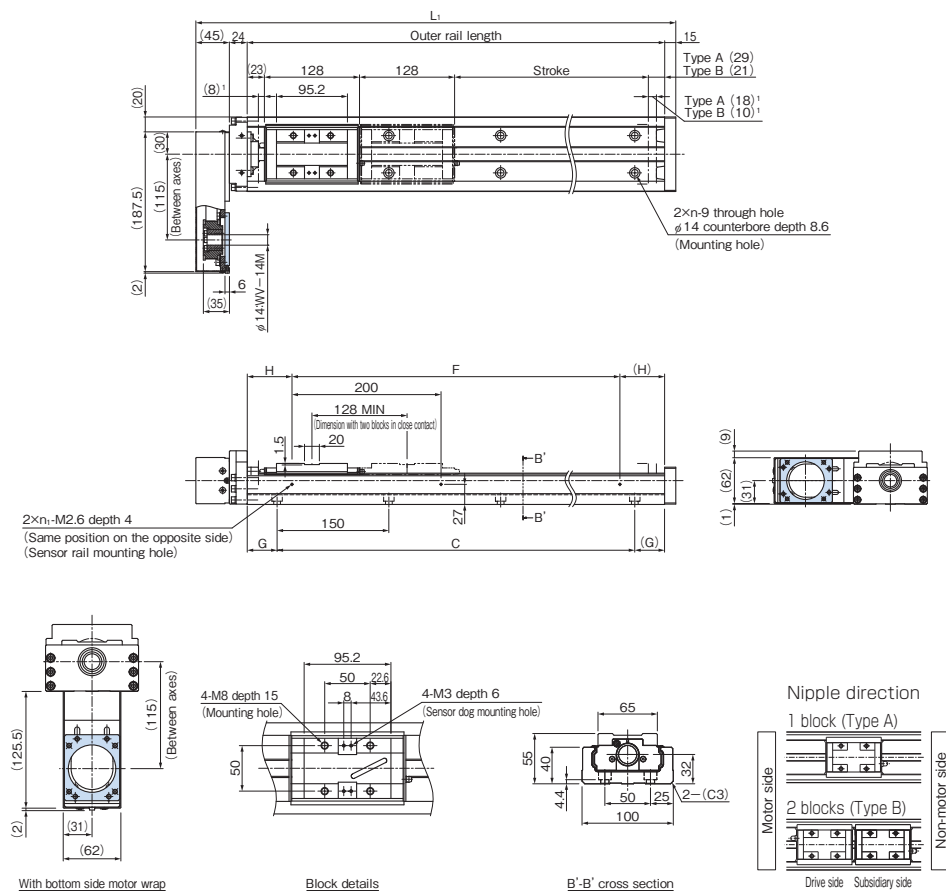

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	C (mm)	G (mm)	F (mm)	H (mm)	n	n_1	Overall main unit mass (kg)	
Type A	Type B ¹									Type A	Type B
800 (826)	680 (698)	980	1,064	900	40	800	90	7	5	21.1	22.9
900 (926)	780 (798)	1,080	1,164	1,050	15	1,000	40	8	6	22.8	24.6
1,000 (1,026)	880 (898)	1,180	1,264	1,050	65	1,000	90	8	6	24.5	26.3
1,100 (1,126)	980 (998)	1,280	1,364	1,200	40	1,200	40	9	7	26.3	28.1
1,200 (1,226)	1,080 (1,098)	1,380	1,464	1,350	15	1,200	90	10	7	28	29.8

¹ Indicates a value when two inner blocks are in close contact with each other.


KR55 With Cover, Motor Wrap

Motor Flange Size, 60×60

Model KR5520A (with a Single Long Block)

Model KR5520B (with Two Long Blocks)

For model number coding, see **A2-136**.

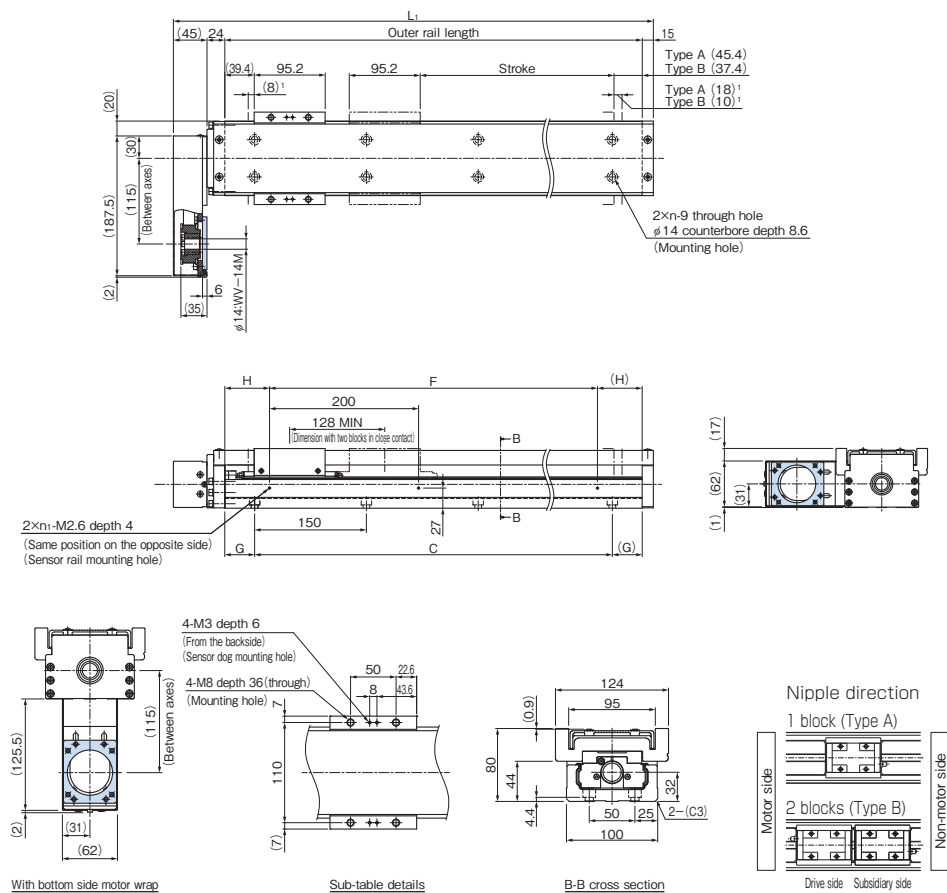

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹									Type A	Type B
800 (826)	680 (698)	980	1,064	900	40	800	90	7	5	25	28.7
900 (926)	780 (798)	1,080	1,164	1,050	15	1,000	40	8	6	26.8	30.5
1,000 (1,026)	880 (898)	1,180	1,264	1,050	65	1,000	90	8	6	28.6	32.3
1,100 (1,126)	980 (998)	1,280	1,364	1,200	40	1,200	40	9	7	30.5	34.2
1,200 (1,226)	1,080 (1,098)	1,380	1,464	1,350	15	1,200	90	10	7	32.3	36

¹ Indicates a value when two inner blocks are in close contact with each other.