

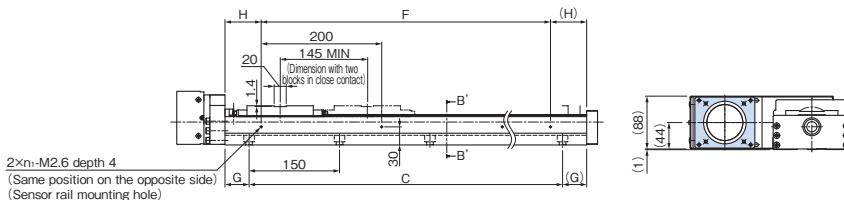


KR65 Without Cover, Motor Wrap


Model KR6525A (with a Single Long Block)

Model KR6525B (with Two Long Blocks)


For model number coding, see **A2-136**.

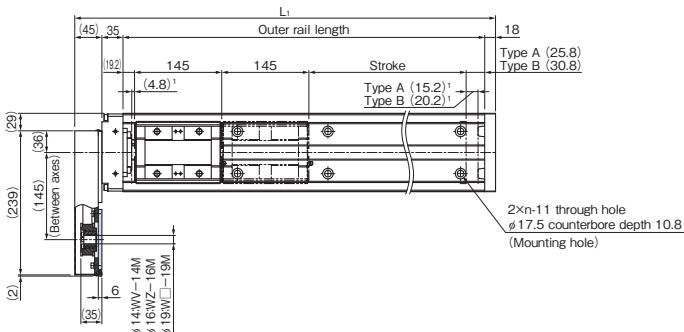


With bottom side motor wrap

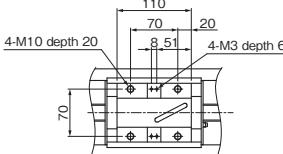

Block details



B'-B' cross section



Drive side Subsidiary side

Non-motor side

¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹									Type A	Type B
790 (810)	640 (665)	980	1,078	900	40	800	90	7	5	33.9	37.2
990 (1,010)	840 (865)	1,180	1,278	1,050	65	1,000	90	8	6	39.3	42.6
1,190 (1,210)	1,040 (1,065)	1,380	1,478	1,200	90	1,200	90	9	7	44.7	48
1,490 (1,510)	1,340 (1,365)	1,680	1,778	1,500	90	1,600	40	11	9	52.7	56




¹ Indicates a value when two inner blocks are in close contact with each other.

KR65 With Cover, Motor Wrap


Model KR6525A (with a Single Long Block)

Model KR6525B (with Two Long Blocks)


For model number coding, see **A2-136**.

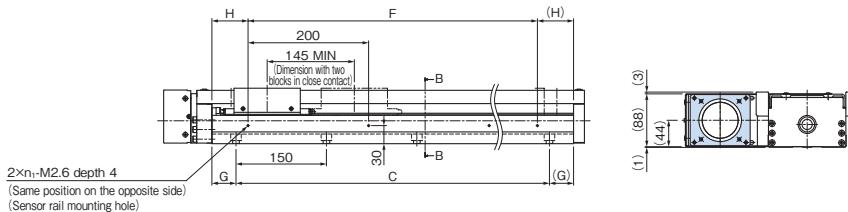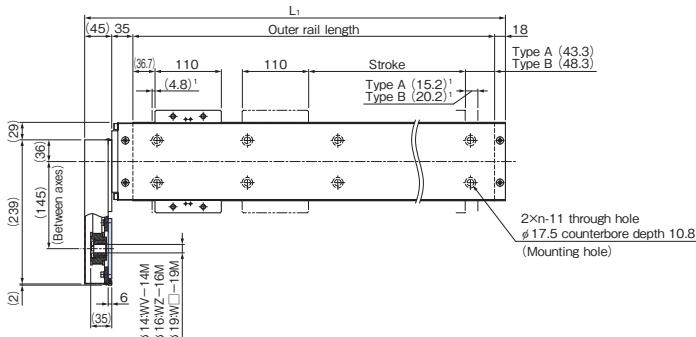


With bottom side motor wrap

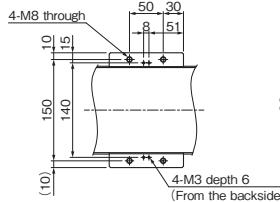

Sub-table details



B-B cross section



¹ Distance between the mechanical stopper and the stroke starting position.

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L ₁ (mm)	C (mm)	G (mm)	F (mm)	H (mm)	n	n ₁	Overall main unit mass (kg)	
Type A	Type B ¹									Type A	Type B
790 (810)	640 (665)	980	1,078	900	40	800	90	7	5	40.3	46.9
990 (1,010)	840 (865)	1,180	1,278	1,050	65	1,000	90	8	6	46	52.6
1,190 (1,210)	1,040 (1,065)	1,380	1,478	1,200	90	1,200	90	9	7	51.7	58.3
1,490 (1,510)	1,340 (1,365)	1,680	1,778	1,500	90	1,600	40	11	9	60.2	66.8

¹ Indicates a value when two inner blocks are in close contact with each other.