


Model LTR

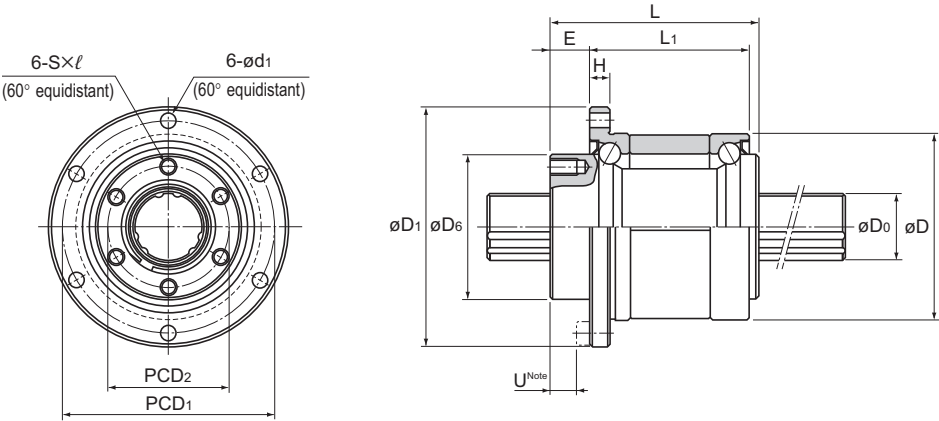

Model No.	Spline nut dimensions										
	Outer diameter		Length	Flange diameter	D ₆ h7	H	L ₁	E	PCD ₁	PCD ₂	S× <i>l</i>
	D	Tolerance									
LTR 16	52	0 -0.007	50	68	39.5	5	37	10	60	32	M5×8
LTR 20	56		63	72	43.5	6	48	12	64	36	M5×8
LTR 25	62		71	78	53	6	55	13	70	45	M6×8
LTR 32	80		80	105	65.5	9	60	17	91	55	M6×10
LTR 40	100	0 -0.008	100	130	79.5	11	74	23	113	68	M6×10
LTR 50	120		125	156	99.5	12	97	25	136	85	M10×15
LTR 60	134	0 -0.009	140	170	115	12	112	25	150	100	M10×15

Model number coding

2 LTR50 K UU ZZ CM +1000L H K


- Model No.

Flange orientation symbol¹

Number of spline nuts on one shaft (no symbol for one nut)
- Spline nut contamination protection accessory symbol²
- Symbol for clearance in the rotational direction⁴

Support bearings contamination protection accessory symbol³
- Accuracy symbol⁵

Overall spline shaft length⁷ (in mm)
- Symbol for spline shaft⁶



Unit: mm

			Spline shaft diameter	Rows of balls	Basic torque rating		Basic load rating		Static permissible moment	Support bearing basic load rating		Mass	
	d ₁	U ^{Note}	D ₀ h7		C _T N·m	C _{0T} N·m	C kN	C ₀ kN	M _A ¹ N·m	C kN	C ₀ kN	Spline nut kg	Spline shaft kg/m
	4.5	5	16	6	31.4	34.3	7.06	12.6	67.6	12.7	11.8	0.51	1.6
	4.5	7	20	6	56.9	55.9	10.2	17.8	118	16.3	15.5	0.7	2.5
	4.5	8	25	6	105	103	15.2	25.8	210	17.6	18	0.93	3.9
	6.6	10	32	6	180	157	20.5	34	290	20.1	24	1.8	5.6
	9	13	40	6	419	377	37.8	60.5	687	37.2	42.5	3.9	9.9
	11	13	50	6	842	769	60.9	94.5	1,340	41.7	54.1	6.7	15.5
	11	13	60	6	1,220	1,040	73.5	111.7	1,600	53.1	68.4	8.8	22.3