


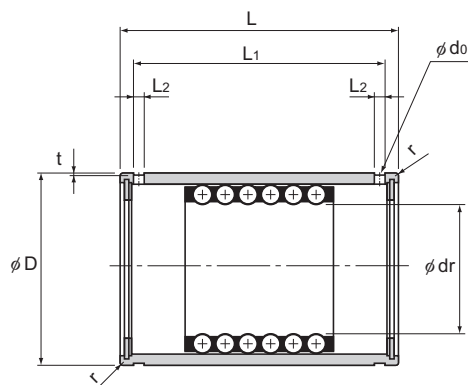

Model ST-B
(For medium load)

Unit: mm

								Basic dynamic load rating	Basic static load rating	Mass
	Length		L ₁	L ₂	t	d ₀	r	C kN	C ₀ kN	g
	L	Tolerance								
	19	0 −0.2	13.5	1.1	0.25	—	0.3	0.98	0.23	8
	24		20.1	1.5	0.5	1.5	0.5	0.98 2.06	0.27 0.55	16.4 17.6
30	25.7		1.5	0.5	1.5	0.5	2.35 4.61	0.62 1.27	31.5 34.5	
32	27.5		1.5	0.5	1.5	0.5	4.02 8.14	1.08 2.25	47 53.5	
37	32.1		1.5	0.5	1.5	0.5	4.02 8.04	1.27 2.65	77 85	
	45	0 −0.3	39.8	2	0.5	2	0.5	4.12 8.33	1.57 3.24	109 120
	45		39.8	2	0.5	2	1	4.12 8.14	1.76 3.63	128 142
	65		58.5	2.5	0.5	2.5	1	9.31 18.7	4.12 8.14	240 275
	70		63.5	2.5	0.7	2.5	1.5	9.41 18.7	4.51 9.02	370 410