


SBKH
No Preload

DN value	130,000
----------	---------

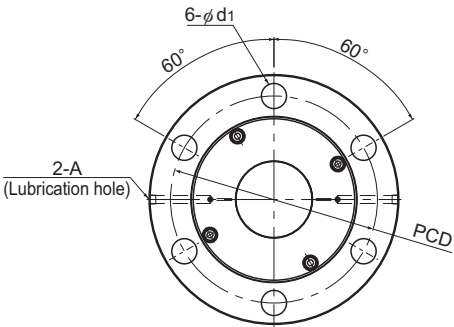

Model No.	Screw shaft outer diameter	Lead	Ball center-to-center diameter	Screw shaft Thread minor diameter	No. of loaded circuits	Basic load rating		Permissible load ¹	Rigidity
	d	Ph	dp	dc	Rows X turns	Ca kN	C _{0a} kN	F _P kN	K N/μm
SBKH 6332-3.8	63	32	66.5	49.8	1×3.8	304	631	88	1,435
SBKH 6340-7.6	63	40	66.0	52.6	2×3.8	413	967	135	2,723
SBKH 8050-7.6	80	50	84.0	63.6	2×3.8	777	1,788	250	3,402
SBKH 8060-7.6	80	60	84.0	63.6	2×3.8	780	1,824	255	3,452
SBKH 10050-7.6	100	50	104.0	83.6	2×3.8	876	2,401	336	4,098
SBKH 10060-7.6	100	60	104.0	83.6	2×3.8	880	2,294	321	4,149
SBKH 12060-7.6	120	60	124.0	103.6	2×3.8	962	2,941	411	4,809

¹ The permissible load F_P indicates the maximum axial load that the ball screw can receive.
Notes: If desiring both ends of the screw shaft to be larger than the screw shaft diameter, contact THK.

Axial Clearance			Unit: mm
Clearance symbol	G1	G2	G3
Axial clearance	0 to 0.01	0 to 0.02	0 to 0.05

Model number coding

SBKH8050-7.6

RR

G2

+1200L

C7


Model Number

Seal symbol¹
(RR: labyrinth seal on both sides)

Axial clearance symbol
(clearance in the axial direction must be: G1, G2 or G3.
Clearance G0 and GT are not supported.)

Overall screw shaft length (in mm)

Accuracy symbol²

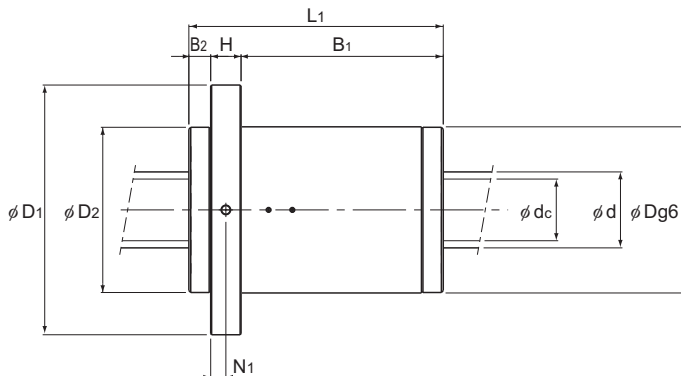

Unit: mm

Nut dimensions											Screw shaft inertial moment/mm kg·m ² /mm	Nut mass kg	Shaft mass kg/m	Permissible rotational speed min ⁻¹
Outer diameter D	Flange diameter D ₁	Cap diameter D ₂	Overall length L ₁	H	B ₁	B ₂	PCD	d ₁	N ₁	Lubrication hole A				
140	205	(140)	190	28	143	(19)	173	22	14	Rc1/8 (PT1/8)	1.21 × 10 ⁻⁵	17.2	21	1,950
127	191	(127)	209	30	163	(16)	159	22	15		1.21 × 10 ⁻⁵	15.5	21	1,960
175	253	(175)	268	32	213	(23)	214	26	16		3.16 × 10 ⁻⁵	36.9	31.3	1,540
175	253	(175)	306	40	243	(23)	214	26	20		3.16 × 10 ⁻⁵	43.5	32.5	1,540
195	273	(195)	269	40	206	(23)	234	26	20		7.71 × 10 ⁻⁵	44.5	51.3	1,250
195	273	(195)	307	40	244	(23)	234	26	20		7.71 × 10 ⁻⁵	50.5	52.9	1,250
210	288	(210)	308	45	240	(23)	249	26	22.5		1.60 × 10 ⁻⁴	53.7	78.1	1,040

Ball Screw

The rigidity values (K) in the table represent spring constants, each obtained from the load and the elastic deformation under an axial load equal to 30% of the basic axial dynamic load rating (Ca).

These values do not include the rigidity of the components related to mounting the ball screw nut. Therefore, it is normally appropriate to regard roughly 80% of the rigidity value (K) in the table as the actual value.

If the axial load (Fa) is not 30% of Ca, the rigidity value (K_N) is obtained from the following equation.

$$K_N = K \left(\frac{F_a}{0.3C_a} \right)^{\frac{1}{3}}$$

K: Rigidity value in the dimensional table