


CNF
No Preload

DN value	70,000
----------	--------




Model No.	Screw shaft outer diameter d	Lead Ph	Ball center- to-center diameter dp	Thread minor diameter dc	No. of loaded circuits Rows × turns	Basic load rating		Rigidity K N/μm	Nut dimensions					
						Ca kN	C ₀ a kN		Outer diameter D	Flange diameter D ₁	Overall length L ₁	H	B ₁	
CNF 1530-6	15	30	15.75	12.5	4×1.6	10.1	24.7	310	32	53	63	10	47	
CNF 2040-6	20	40	20.75	17.5	4×1.65	12	34.4	400	37	57	81	10	65	
CNF 2550-6	25	50	26	21.9	4×1.65	18.9	53.9	460	45	69	102	12	81.5	
CNF 3060-6	30	60	31.25	26.4	4×1.65	26.2	77.7	600	55	89	122	15	97	

Model number coding

CNF2040-6 ZZ +1500L C7 T H1K

Model No. Contamination protection accessory symbol¹ Overall screw shaft length (in mm) Accuracy symbol² Symbol for rolled shaft Recommended shaft ends shape code

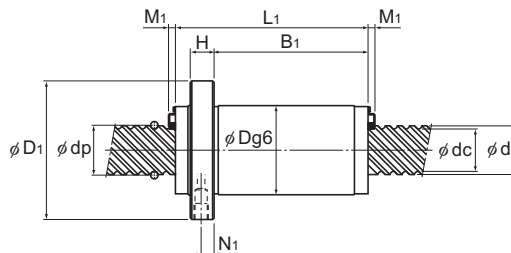

Unit: mm

	Nut dimensions					Axial clearance	Standard shaft length	Screw shaft inertial moment/ mm	Nut mass	Shaft mass	Permissible rotational speed
	PCD	d _i	Lubrication hole		Seal						
			N _i	A							
	43	5.5	5	M6	3.5	0.1	500, 1,000, 1,500	3.90 × 10 ⁻⁸	0.42	1.19	4,440
	47	5.5	5.5	M6	3.5	0.1	500, 1,000, 1,500, 2,000	1.23 × 10 ⁻⁷	0.5	2.12	3,370
	57	6.6	7	M6	3.5	0.1	1,000, 1,500, 2,000, 3,000	3.01 × 10 ⁻⁷	0.85	3.34	2,690
	71	9	9	M6	3.8	0.14	1,000, 2,000, 3,000, 4,000	6.24 × 10 ⁻⁷	1.7	4.84	2,240