



Round Supported-Side Support Unit Model FF

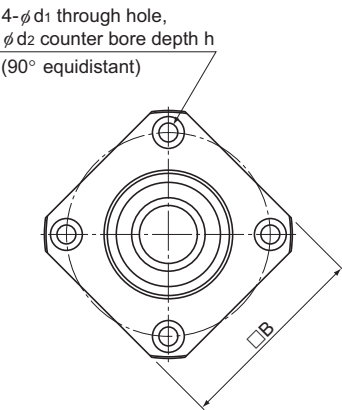

Model No.	Shaft diameter d	L	H	F	D	A
FF 6	6	10	6	4	22 ^{-0.007} _{-0.02}	36
FF 10	8	12	7	5	28 ^{-0.007} _{-0.02}	43
FF 12	10	15	7	8	34 ^{-0.009} _{-0.025}	52
FF 15	15	17	9	8	40 ^{-0.009} _{-0.025}	63
FF 20	20	20	11	9	57 ^{-0.01} _{-0.029}	85
FF 25	25	24	14	10	63 ^{-0.01} _{-0.029}	98
FF 30	30	27	18	9	75 ^{-0.01} _{-0.029}	117



Unit: mm

	PCD	B	d_1	d_2	h	Bearing used	Snap ring used	Mass kg
	28	28	3.4	6.5	4	606ZZ	C6	0.04
	35	35	3.4	6.5	4	608ZZ	C8	0.07
	42	42	4.5	8	4	6000ZZ	C10	0.11
	50	52	5.5	9.5	5.5	6002ZZ	C15	0.2
	70	68	6.6	11	6.5	6204ZZ	C20	0.27
	80	79	9	14	8.5	6205ZZ	C25	0.67
	95	93	11	17.5	11	6206ZZ	C30	1.07