


Model CF (Popular Type)

Optional specifications		Symbol
Roller guide	With cage	No Symbol
	Full rollers	V
Material	Carbon steel	No Symbol
	Stainless steel	M
Seal	Without seal	No Symbol
	With seal	UU
Outer ring shape	Cylindrical outer ring	No Symbol
	Spherical outer ring	R




Stud diameter	Model No.	Main dimensions											Shoulder height f (Min.)
		Outer diameter	Outer ring width	Threaded			Overall length						
d		D	C	G	G ₁	B	B ₁	B ₂	C ₁	d ₁	r _{min}		
5	CF 5	13	9	M5×0.8	7.5	10	23	13	0.5	3.1	0.3	9.7	
6	CF 6	16	11	M6×1	8	12	28	16	0.6	4	0.3	11	
8	CF 8	19	11	M8×1.25	10	12	32	20	0.6	4	0.3	13	
10	CF 10	22	12	M10×1.25	12	13	36	23	0.6	4	0.3	15	
10	CF 10-1	26	12	M10×1.25	12	13	36	23	0.6	4	0.3	15	

Note: For information on accuracy standards, please refer to **A19-14**.

Model number coding

CF6	V	M	UU	R	-N
Model No.					No symbol: No grease nipple
No symbol: With cage					N : Dedicated grease nipple included (See A19-39)
V : Full-roller Type					
No symbol: Carbon steel					
M : Stainless steel					
No symbol: without seal					No Symbol : Cylindrical outer ring
UU : With seal					R : Spherical outer ring

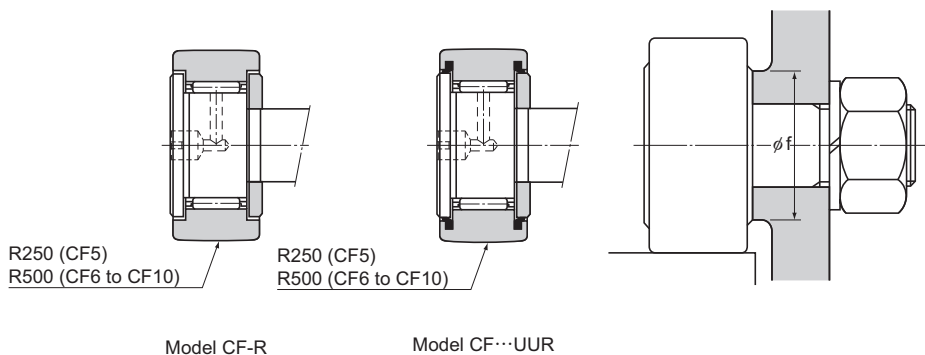

Unit: mm

	Basic load rating				Maximum permissible load F ₀ kN	Track load capacity		Rotational speed limit ¹		Mass	
	With cage		Full rollers			Cylindrical outer ring kN	Spherical outer ring kN	With cage min ⁻¹	Full rollers min ⁻¹	With cage g	Full rollers g
	C kN	C ₀ kN	C kN	C ₀ kN							
	3.14	2.77	5.1	5.5	1.42	2.25	0.53	29000	11600	10.5	11
	3.59	3.58	6.94	8.5	2.11	3.43	1.08	25000	11000	18.5	19
	4.17	4.65	8.13	11.2	4.73	4.02	1.37	20000	8700	28.5	29
	5.33	6.78	9.42	14.3	5.81	4.7	1.67	17000	7200	45	46
	5.33	6.78	9.42	14.3	5.81	5.49	2.06	17000	7200	60	61

¹ The rotation speed limit value in the table applies to models that have no seal and use grease lubrication. With those models using oil lubrication, up to 130% of this value is permitted. With those attached with seals, up to 70% of this value is permitted.