


Models SVS-C and SVS-LC

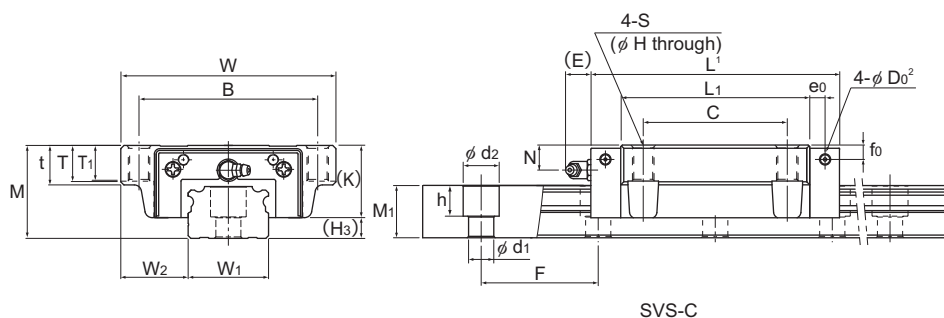

Model No.	Outer dimensions			LM block dimensions													Pilot hole for side nipple			
	Height	Width	Length ¹													Grease nipple				
	M	W	L	B	C	S	H	L ₁	t	T	T ₁	K	N	E	e ₀		f ₀	D ₀ ²	H ₃	
SVS 25C SVS 25LC	31	72	82.8 102	59	45	M8	6.8	61.4 80.6	16	14.8	12	25.5	7.8	12	B-M6F	4.5	5.1	3.9	5.5	
SVS 30C SVS 30LC	38	90	98 120.5	72	52	M10	8.5	72.1 94.6	18.1	16.9	14	31	10.3	12	B-M6F	6.5	7	3.9	7	
SVS 35C SVS 35LC	44	100	109.5 135	82	62	M10	8.5	79 104.5	20.1	18.9	16	35	12.1	12	B-M6F	6	8	5.2	9	
SVS 45C SVS 45LC	52	120	138.2 171	100	80	M12	10.5	105 137.8	22.1	20.6	20	40.4	13.9	16	B-PT1/8	8.5	8	5.2	11.6	
SVS 55C SVS 55LC	63	140	163.3 200.5	116	95	M14	12.5	123.6 160.8	24	22.5	22	49	16.6	16	B-PT1/8	10	10	5.2	14	
SVS 65C SVS 65LC	75	170	186 246	142	110	M16	14.5	143.6 203.6	28	26	25	60	19	16	B-PT1/8	8.7	15	8.2	15	

Model number coding

SVS45 LC 2 QZ TTHH C0 +1200L P T - II

Model No.

Type of
LM block

With QZ
Lubricator

Contamination
protection accessory
symbol

LM rail length (in mm)


Radial clearance symbol
Normal (No symbol)
Light preload (C1)
Medium preload (C0)

Symbol for
LM rail jointed use

Accuracy symbol
Normal grade (No Symbol)/High accuracy grade (H)
Precision grade (P)/Super precision grade (SP)
Ultra precision grade (UP)

Symbol for No. of rails
used on the same plane

No. of LM blocks
used on the same rail

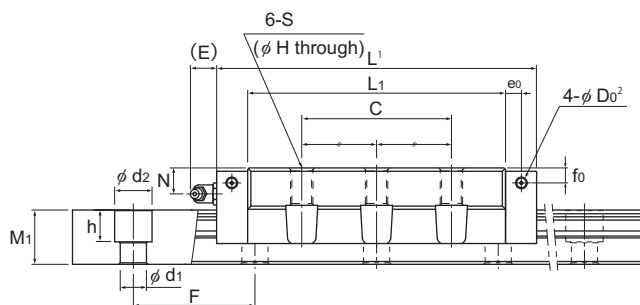

SVS-LC

Unit: mm

	LM rail dimensions						Basic load rating ⁴		Static permissible moment kN·m ⁵					Mass	
	Width W ₁ 0 -0.05	Height W ₂	Pitch M ₁	Pitch F	Length ³ d ₁ ×d ₂ ×h Max	C kN	C ₀ kN	M _A 		M _B 		M _C 	LM block kg	LM rail kg/m	
								1 block	2 blocks	1 block	2 blocks	1 block			
25	23.5	17	40	6×9.5×8.5	3000	37 43.7	52.2 66.1	0.479 0.75	2.41 3.71	0.443 0.693	2.23 3.43	0.525 0.665	0.6 0.8	2.9	
28	31	21	80	7×11×9	3000	52 64.4	70.1 95.2	0.722 1.31	3.86 6.3	0.667 1.21	3.58 5.83	0.798 1.08	1.1 1.5	4.2	
34	33	24.5	80	9×14×12	3000	68.6 86.1	88.6 123	1 1.88	5.49 9.15	0.927 1.73	5.09 8.46	1.2 1.67	1.6 2	6.0	
45	37.5	29	105	14×20×17	3090	105 123	142 178	2.19 3.58	10.9 17.5	2.02 3.31	10.1 16.2	2.6 3.44	2.7 3.6	9.5	
53	43.5	36.5	120	16×23×20	3060	136 164	180 237	3.17 5.4	16.4 26	2.93 4.99	15.1 24	3.76 4.96	4.5 5.9	14	
63	53.5	43	150	18×26×22	3000	208 260	269 370	5.76 10.7	27.7 49.6	5.33 9.88	25.6 45.8	6.66 9.16	7.8 11.0	19.6	