


Model FBW2560XR

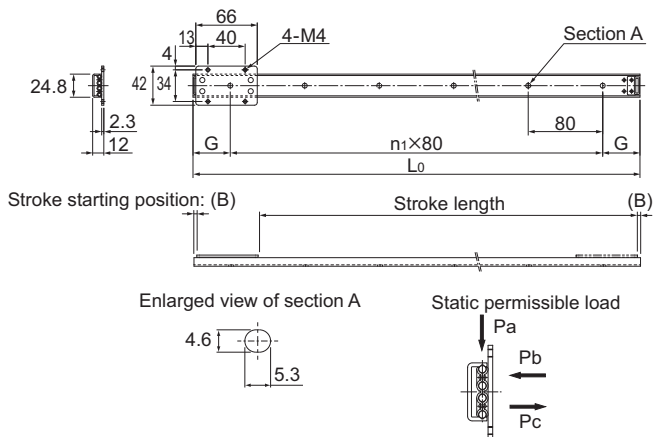

Unit: mm


Slide rail length L_0	Main dimensions		Without seal		With seal		Static permissible load N			Slide rail mass g
	n_1	G	B	Stroke length	B	Stroke length	P_a	P_b	P_c	
160	1	40	3	88	5.5	83	590	150	70	70
240	2	40	3	168	5.5	163	590	150	70	110
320	3	40	3	248	5.5	243	590	150	70	140
400	4	40	3	328	5.5	323	590	150	70	180
480	5	40	3	408	5.5	403	590	150	70	210
560	6	40	3	488	5.5	483	590	150	70	250
640	7	40	3	568	5.5	563	590	150	70	290
720	8	40	3	648	5.5	643	590	150	70	320
800	9	40	3	728	5.5	723	590	150	70	360
880	10	40	3	808	5.5	803	590	150	70	390
960	11	40	3	888	5.5	883	590	150	70	430
1040	12	40	3	968	5.5	963	590	150	70	460
1200	14	40	3	1128	5.5	1123	590	150	70	540

Notes: The FBW2560XR slider mass is 70 g.
This model is also available with a dust cover, see **■12-9**.
Lithium soap-based grease No. 2 is applied to the slider and ball circulation components.

Model number coding

2	FBW2560XR	UU +800L - T
Model No.		
No. of sliders connected on the same rail (no symbol for a single slider)		Overall slide rail length (mm)
		Jointed slide rails symbol ¹
		With seal (no symbol for products without a seal)

Model FBW3590XR

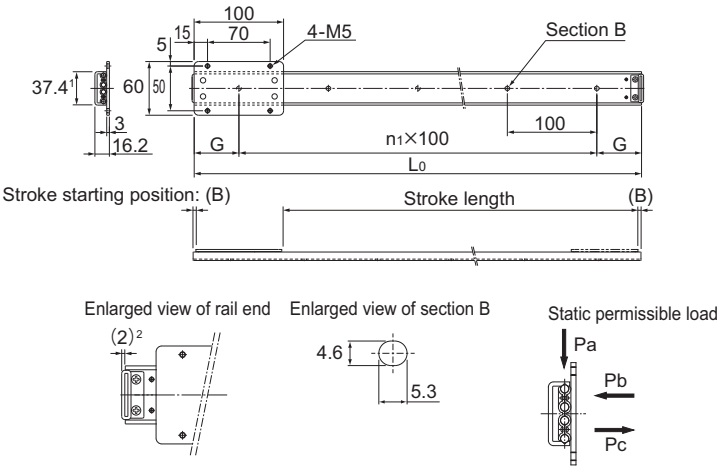

Unit: mm

Slide rail length L_0	Main dimensions		Without seal		With seal		Static permissible load N			Slide rail mass g
	n_1	G	B	Stroke length	B	Stroke length	P_a	P_b	P_c	
300	2	50	0	200	2.5	195	880	200	100	280
350	3	25	0	250	2.5	245	880	200	100	330
400	3	50	0	300	2.5	295	880	200	100	380
450	4	25	0	350	2.5	345	880	200	100	420
500	4	50	0	400	2.5	395	880	200	100	470
550	5	25	0	450	2.5	445	880	200	100	520
600	5	50	0	500	2.5	495	880	200	100	560
650	6	25	0	550	2.5	545	880	200	100	610
700	6	50	0	600	2.5	595	880	200	100	650
750	7	25	0	650	2.5	645	880	200	100	710
800	7	50	0	700	2.5	695	880	200	100	750
900	8	50	0	800	2.5	795	880	200	100	850
1000	9	50	0	900	2.5	895	880	200	100	930
1200	11	50	0	1100	2.5	1095	880	200	100	1090
1500	14	50	0	1400	2.5	1395	880	200	100	1410
1800	17	50	0	1700	2.5	1695	880	200	100	1740

¹ The rail is 0.4 mm wider than the previous model (FBW3590R).

² For Model FBW3590XR, the stopper protrudes past the end of the slide rail.

Notes: The FBW3590XR slider mass is 250 g.

This model is also available with a dust cover, see **A12-9**.

Lithium soap-based grease No. 2 is applied to the slider and ball circulation components.

Model number coding

2 FBW3590XR

Model No.

No. of sliders connected on the same rail
(no symbol for a single slider)

UU +800L - T

Overall slide rail length (mm)

With seal
(no symbol for products without a seal)

Jointed slide rails symbol¹